

Ordinance No. 123392

Council Bill No. 116943

AN ORDINANCE relating to land use and zoning; amending Sections 23.41.010, 23.41.014, 23.55.030, and 23.73.010 of the Seattle Municipal Code, adding a new subsection to Section 23.41.12, approving and adopting revised Neighborhood Design Guidelines for the Pike/Pine Urban Center Village, and amending provisions in the Pike/Pine Conservation Overlay District to better maintain the character of the Pike/Pine neighborhood.

Related Legislation File:

Date Introduced and Referred: <u>August 16, 2010</u>	To: (committee): <u>Built Environment</u>
Date Re-referred:	To: (committee):
Date Re-referred:	To: (committee):
Date of Final Action: <u>9.13.10</u>	Date Presented to Mayor: <u>9.14.10</u>
Date Signed by Mayor: <u>Sept. 23, 2010</u>	Date Returned to City Clerk: <u>Sept. 24, 2010</u>
Published by Title Only _____	Date Vetoed by Mayor:
Published in Full Text <input checked="" type="checkbox"/>	Date Passed Over Veto:
Date Veto Published:	Date Returned Without Signature:

The City of Seattle – Legislative Department

Council Bill/Ordinance sponsored by: [Signature]

Committee Action:

Date	Recommendation	Vote
<u>090810</u>	<u>APPROVE</u>	<u>1-0</u>
	<u>as amended</u>	<u>SC</u>

This file is complete and ready for presentation to Full Council.

Full Council Action:

Date	Decision	Vote
<u>9.13.10</u>	<u>Passed</u>	<u>8-0</u>
		<u>SG excused</u>

ORDINANCE 123392

1
2 AN ORDINANCE relating to land use and zoning; amending Sections 23.41.010, 23.41.014,
3 23.55.030, and 23.73.010 of the Seattle Municipal Code, adding a new subsection to
4 Section 23.41.12, approving and adopting revised Neighborhood Design Guidelines for
5 the Pike/Pine Urban Center Village, and amending provisions in the Pike/Pine
6 Conservation Overlay District to better maintain the character of the Pike/Pine
7 neighborhood.

8 WHEREAS, in response to the 1991 Pike/Pine Planning Study sponsored and conducted by a
9 coalition of Pike/Pine neighborhood and civic groups, business and property owners, and
10 residents, the Pike/Pine Overlay District was established to preserve and enhance the
11 area's mixed-use character; and

12 WHEREAS, in March 1999, the City Council adopted Ordinance 119413 amending the City's
13 Comprehensive Plan to include key goals and policies from the 1998 Pike/Pine Urban
14 Center Village Plan, which reaffirmed the neighborhood's commitment to mixed-use
15 development, while identifying additional priorities including: 1) sustaining the character
16 of Pike/Pine through implementation of urban design recommendations and policy
17 changes and 2) considering a "conservation district" for the neighborhood; and

18 WHEREAS, in September 2000, the City Council adopted Ordinance 120081 adopting
19 Neighborhood Design Guidelines for the Pike/Pine Urban Center Village; and

20 WHEREAS, in July 2009, the City Council adopted Ordinance 123020, renaming the overlay
21 district the Pike/Pine Conservation Overlay District, expanding its boundaries, and
22 adding provisions that limit the scale of new projects, encourage new projects to retain
23 existing structures as part of a development site, provide spaces for small businesses at
24 street level, and accommodate facilities serving the arts, to further the preservation and
25 enhancement of the unique character of the Pike/Pine neighborhood; and

26 WHEREAS, additional design guidelines for Pike/Pine and greater involvement of the Design
27 Review Board will encourage new buildings and signage that contribute to the character
28 of the Pike/Pine neighborhood and help maintain "character structures" that are
incorporated into new developments;

WHEREAS, the Department of Planning and Development is updating the 15 year old citywide
design guidelines on which all neighborhood design guidelines are based, and this effort
provides an opportunity to reorganize the Pike/Pine Neighborhood Design Guidelines to
match the new citywide format, and to update the illustrations in the Pike/Pine
Neighborhood Design Guidelines; NOW THEREFORE,

BE IT ORDAINED BY THE CITY OF SEATTLE AS FOLLOWS:

1 Section 1. Section 23.41.010 of the Seattle Municipal Code, which section was last
2 amended by Ordinance 122994, is amended as follows:

3 **Section 23.41.010 Design Review Guidelines**

4 A. The "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended 2006)"
5 and neighborhood design guidelines approved by the City Council and identified in subsection B
6 of Section 23.41.010, provide the basis for Design Review Board recommendations and City
7 design review decisions, except in Downtown, where the "Guidelines for Downtown
8 Development, 1999" apply. Neighborhood design guidelines are intended to augment and make
9 more specific the "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended
10 2006)" and the "Guidelines for Downtown Development, 1999." To the extent there are conflicts
11 between neighborhood design guidelines and the "Guidelines for Multifamily and Commercial
12 Buildings, 1998 (Amended 2006)" or "Guidelines for Downtown Development, 1999", the
13 neighborhood design guidelines prevail.
14
15

16 B. The following Neighborhood design guidelines are approved:

- 17 1. "University Community Design Guidelines, 2000;"
- 18 2. "Pike/Pine Urban Center Village Design Guidelines, ((2000)) 2010;"
- 19 3. "Roosevelt Urban Village Design Guidelines, 2000;"
- 20 4. "Ballard Municipal Center Master Plan Area Design Guidelines, 2000;"
- 21 5. "West Seattle Junction Urban Village Design Guidelines, 2001;"
- 22 6. "Green Lake Neighborhood Design Guidelines, 2001;"
- 23 7. "Admiral Residential Urban Village Design Guidelines, 2002;"
- 24 8. "South Lake Union Neighborhood Design Guidelines, 2005;"
- 25 9. "Northgate Urban Center and Overlay District Design Guidelines, 2003;"
- 26
- 27
- 28

10. Belltown Urban Center Village Design Guidelines, 2004;
11. Wallingford Neighborhood Design Guidelines, 2005;
12. Capitol Hill Neighborhood Design Guidelines, 2005;
13. Greenwood/Phinney Neighborhood Design Guidelines, 2005;
14. Othello Neighborhood Design Guidelines, 2005;
15. North Beacon Hill Design Guidelines, 2006;
16. North District/Lake City Guidelines, 2006;
17. Morgan Junction Neighborhood Design Guidelines, 2007;
18. Upper Queen Anne Neighborhood Design Guidelines, 2009; and
19. Uptown Neighborhood Design Guidelines, 2009.

Section 2. A new subsection E of Section 23.41.012, which section was last amended by Ordinance 123206, is added as follows:

23.41.012 Development standard departures

* * *

E. Departures for retaining character structures on lots in the Pike/Pine Conservation Overlay District. Departures from the conditions in subsections 23.73.010.C.2 and 23.73.010.F.2 when retaining a character structure as part of a new project may be granted if the following conditions are met:

1. The retained portion of the character structure is sufficient to give the appearance of a free-standing structure; or
2. The newly-constructed portion of the project, through vertical or horizontal modulation or other design treatments, generally provides for better integration of the physical

1 appearance and arrangement of interior spaces between the character structure and the new
2 project than would occur through the strict application of subsection 23.73.010.C.1; or

3 3. Additional flexibility is necessary to maintain a character structure on a small
4 development lot that is 8,000 square feet or less in size; and

5 4. The ground story of the character structure can accommodate the elements of
6 the proposed new structure, such as a mezzanine or additional story, while maintaining the
7 original character of the character structure by: retaining sufficient portions of the ground floor
8 that are visible from the street at the original floor to ceiling height, through appropriate
9 placement and design of the new structure, or through other design means that are consistent
10 with the Pike/Pine Urban Center Design Guidelines.
11

12 Section 3. Subsection B of Section 23.41.014, which section was last amended by
13 Ordinance 123206, is amended as follows:
14

15 **23.41.014 Design review process**

16 * * *

17 B. Early Design Guidance Public Meeting.

18 1. Following a preapplication conference, and site visits by Design Review Board
19 members assigned to review a proposed project, an early design guidance public meeting with
20 the Design Review Board shall be held.
21

22 2. The purpose of the early design guidance public meeting shall be to identify
23 concerns about the site and the proposed project, review the design guidelines applicable to the
24 site, determine neighborhood priorities among the design guidelines, and explore design
25 concepts and/or options.
26

1 3. At the early design guidance public meeting, the project proponents shall
2 present the following information:

3 a. An initial site analysis addressing site opportunities and constraints, the
4 use of all adjacent buildings, and the zoning of the site and adjacent properties; and

5 b. A drawing of existing site conditions, indicating topography of the site
6 and the location of structures and prominent landscape elements on or abutting the site (including
7 but not limited to all trees ~~((six (6)))~~ 6 inches or greater in diameter measured ~~((four and one half~~
8 ~~(4½)))~~ 4.5 feet above the ground, with species indicated); and

9 c. Photos showing the facades of adjacent development, trees on the site,
10 general streetscape character and territorial or other views from the site, if any; and

11 d. A zoning envelope study ~~((which))~~ that includes a perspective drawing;
12 and

13 e. A description of the proponent's objectives with regard to site
14 development.

15 f. In the Pike/Pine Conservation Overlay District established in Section
16 23.73.004, if a character structure is located on the same lot as a proposed project, the applicant
17 shall:

18 1) Analyze the features that define the developed context of the
19 structures located on the block front where the project is proposed, and on all block fronts facing
20 the project;

21 2) Evaluate the relationship of the character structure's key
22 architectural and structural elements to the developed context, and how the new project will
23 respond to this relationship; and

1 C. Retaining character structures on a lot. A 25 percent increase in the floor size limit
2 above 35 feet in height is permitted for projects that incorporate a character structure on the same
3 lot, either as a whole structure or as a portion of a structure, pursuant to the following provisions.

4 1. No increase in floor size is permitted under the provisions of this subsection for
5 a project that will result in the demolition of a designated Seattle Landmark or a character
6 structure identified on Table A for 23.73.010.

7
8 2. For a project that incorporates portions of a character structure, the following
9 conditions shall be met:

10 a. All street-facing facades of the character structure are retained; ~~((and))~~

11 b. All portions of the new structure above the height of the street facing
12 facades of the character structure are set back a minimum of 15 feet from all street property lines
13 that abut the character structure~~((-)); and~~

14 c. The original floor-to-ceiling height of the ground story is maintained.

15
16 ~~((3. As an alternative to the provisions of subsection 23.73.010.C.2, the Director
17 may, as a Type I decision, waive or modify the conditions of this subsection, based on the
18 following:~~

19
20 a. ~~The portion of the structure that is retained is sufficient to give the
21 appearance of a free-standing building; or~~

22 b. ~~The newly constructed portion of the project, through vertical or
23 horizontal modulation or other design treatments, generally provides for a better integration of
24 the existing structure with the new project, in terms of both physical appearance and the
25 arrangement of interior spaces, than would otherwise occur through the strict application of the
26 standards in subsection 23.73.010.C.1; or~~

~~e. Additional flexibility is necessary to maintain a character structure on a small development lot that is 8,000 square feet in size or less.))~~

((4))3. Any floor area in a new portion of the structure above 35 feet in height that is within the area of the original footprint of the character structure and is separated from the street along all street frontages by the original facades of the character structure is not included in the calculation of the floor area subject to the floor size limit.

((5))4. A project that is granted an increase in floor size under the provisions of this subsection 23.73.010.C shall maintain the character structure, or portions of the character structure, both interior and exterior, in good condition and repair and in a manner that preserves unique features and characteristics for the life of the project. Any increase in floor size permitted pursuant to this Section 23.73.010.C shall not be combined with any increase in floor size permitted pursuant to Section 23.73.010.B.

Table A for 23.73.010
Identified Character Structures ¹

Address	Historic Name	Common Name
1519 12th Avenue	Overland Pacific Building	Police Department East Precinct
300 E. Pine Street	Butterworth Mortuary	Butterworth Mortuary
1501 Broadway	Broadway State Bank	Tully's
1205 E. Pine Street	McAlpin-Schreiner Company	Foley Sign Company
1021 E. Pine Street	Colyear Motor Sales Company	REI/Velo Bike
901-911 E. Pike Street	Tyson Oldsmobile Company	Frame Central
1217-1221 E. Pike Street	S. L. Savidge	Elysian Brewery
915-919 E. Pike Street	Graham Motor Cars	Shambhala Center of Seattle
1525 11 th Avenue	Bocker Building	REI/Value Village
1400 12 th Avenue	Bekins Moving and Storage	Trace Lofts
1201-1205 E. Pike Street	Standard Brands	1205 E. Pike Building
1519-1521 Broadway	Eldridge Tire Company	Broadway Café
1120-1124 E. Pike Street	Packard Seattle	Utrecht Art Supplies
953 E. Union Street	Otto's Radiator Service	The Finer Details
301-309 E. Pine Street	Melrose Building	Melrose Building
311-321 E. Pine Street	Timken Roller Bearing	Le Frock
721-725 E. Pine Street	Flick and Rash	Bill's Off Broadway

Address	Historic Name	Common Name
1600 Broadway	Boone and Company Pontiac	AEI Music
1511 Boylston Avenue	Glencoe Apartments	Glencoe Apartments

Address	Historic Name	Common Name
1633 Melrose Avenue	Sherwood Apartments	Sherwood Apartments
1631 Belmont Avenue	Conrad Apartments	Conrad Apartments
401 E. Pine Street	Carr Brothers Auto Repair	General Petroleum Museum
1520 Melrose Avenue	Melrose Apartments	Melrose Apartments
1351 Olive Way	Unknown	Fillipi's Old Books and Records
1611 Boylston Avenue	Universal Repair Shop	Universal Repair Shop
1001 E. Pike Street	Unknown	Arensberg/La Puerta
1134 Broadway	Unknown	Vacant
1400 Broadway	Johnson & Hamilton Mortuary	Gilda's Club of Seattle
1426 Broadway	Unknown	Rutherford's Auto Rebuild
1158 Broadway	Unknown	Complete Automotive
1414 Broadway	Western Auto Wrecking	Aker's
1612 Broadway	Unknown	AEI Music
400 E. Pine Street	Hirsch Cycle Co.	Lighting Design Lab and 4 others
501 E. Pine Street	Unknown	Bell Occhio 7 and 3 others
610 E. Pine Street	Unknown	Capitol Loans and 4 others
619 E. Pine Street	Paige Building	R Place
801-805 E. Pine Street	Masonic Temple	Egyptian Theater and SCCC
911-919 E. Pine Street	Odd Fellows Temple	Odd Fellows Temple
909 E. Pine Street	Unknown	In 2 Services
1101 E. Pine Street	S-E Co.	2 nd Base and 1 other
1315-1323 E. Pine Street	Chester Apartments	Capital Grocery and 2 others
1100-1106 E. Union Street	Unknown	Union Art Co-op
1015-1021 E. Pike Street	Lorraine Court Apartments	Wildrose and 2 others
300 E. Pike Street	Gallagher's Fine Cars	Six Arms
1415-1423 10 th Avenue	Unknown	Crescent Down works and 4 others
1101-1103 E. Pike Street	Liebeck Garage	Aria and 7 others
1011-1013 E. Pike Street	Unknown	Chrissa's Window Bar and 1 other
1319 E. Madison Street	Talbot Building	Callahan's Auto Rebuild

¹ Source of Table A for 23.73.010: The Department of Neighborhoods November 2002 Historic Resources Survey, structures categorized as "Yes - Inventory" or "Yes - Hold".

* * *

F. Height exception for lots that include a character structure. In zones with a mapped height limit of 65 feet, or with a 40 foot mapped height limit with provisions allowing for

1 additional height up to 65 feet pursuant to subsection 23.47A.012.A, the Director may permit the
2 height of a structure to exceed the height limit of the zone by 10 feet, subject to the following:

3 1. The lot includes a character structure, or significant portion of a character
4 structure (~~and meets the provisions of subsection 23.73.010.C~~);

5 2. For a project that incorporates a character structure, the following conditions
6 shall be met:

7 a. All street facing facades of the character structure are retained;

8 b. All portions of the new structure above the height of the street facing
9 facades of the character structure are set back a minimum of 15 feet from all street property lines
10 that abut the character structure; and

11 c. The original floor to ceiling height of the ground story is maintained.

12 ((2))3. The additional floor area above the height of 65 feet is occupied solely by
13 residential use; and

14 ((3)). The project will not result in the demolition of a designated landmark or of
15 a character structure that is identified on Table A for 23.73.010, except as allowed to include a
16 portion of a character structure in the new development pursuant to subsection 23.73.010.C.

17
18 * * *

1 Section 6. This ordinance shall take effect and be in force thirty (30) days from and after
2 its approval by the Mayor, but if not approved and returned by the Mayor within ten (10) days
3 after presentation, it shall take effect as provided by Municipal Code Section 1.04.020.

4 Passed by the City Council the 13th day of September, 2010, and signed by me in open
5 session in authentication of its passage this 13th day of September, 2010.

6
7 
8 President _____ of the City Council

9 Approved by me this 23rd day of Sept., 2010.

10
11 
12 Michael McGinn, Mayor


13 Filed by me this 24th day of Sept., 2010.

14
15 
16 City Clerk

17 (Seal)
18
19
20
21
22

23 Attachment 1: Pike/Pine Urban Center Village Design Guidelines, 2010
24
25
26
27
28

Attachment I: Pike/Pine Design Guidelines Ordinance

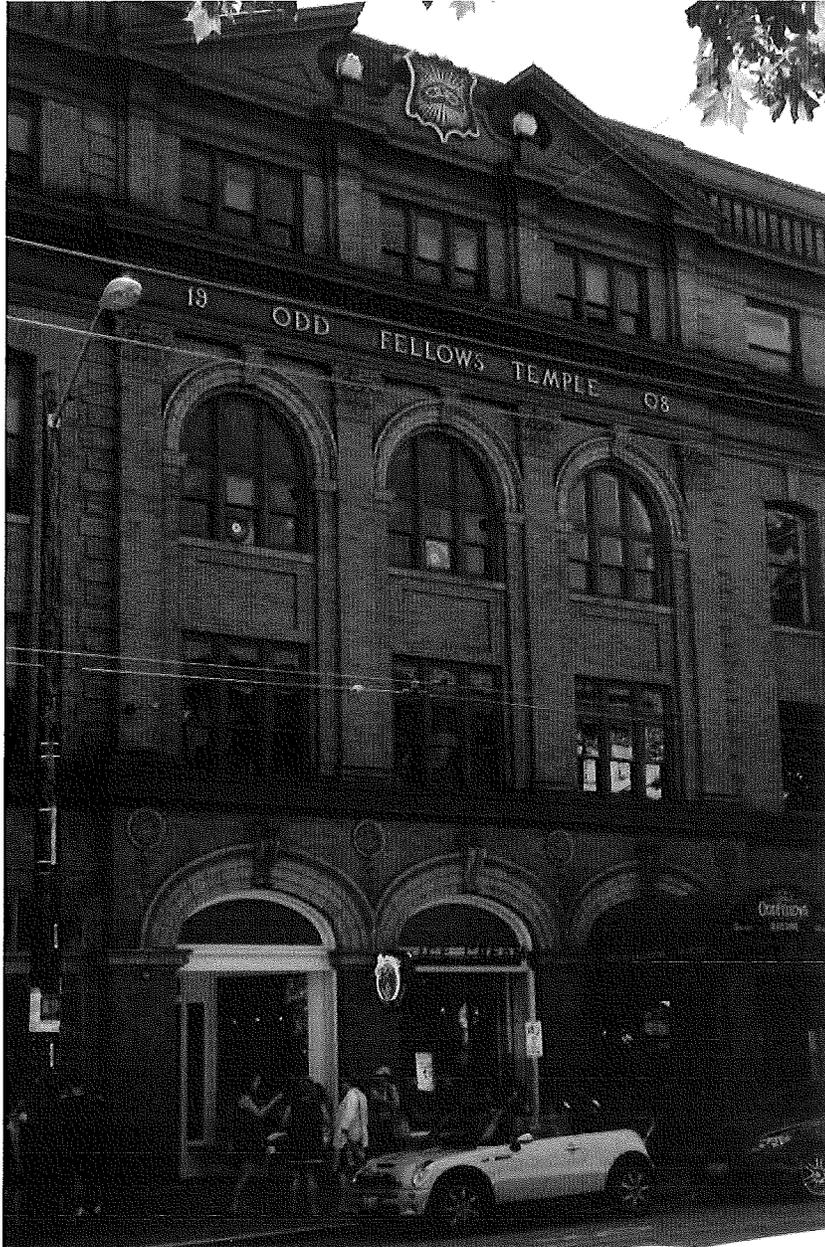

Pike/Pine Urban Center Village Design Guidelines

August 9, 2010

Projects requiring Design Review must comply with the neighborhood design guidelines in this handbook as well as the Citywide Design Guidelines.

Note: The guidelines are numbered to correspond to the Citywide Design Guidelines (A-1, A-2, etc). A gap in the numerical sequence means there are no neighborhood design guidelines for that particular Citywide Guideline.

A. SITE PLANNING

A-1 Responding to Site Characteristics

Characteristics and opportunities to consider in Pike/Pine include both views and other neighborhood features including:

- A change in street grid alignment causing unique, irregular-shaped lots, including Union and Madison and 10th and Broadway Court
- "Bow tie" intersections at 13th/14th between Pike/Pine/Madison



Site Planning

responding to site characteristics

transition between residence and street

residential open space

A-6 Transition Between Residence and Street

Residential entry ways that feature heavy or contrasting trim, distinctive materials and a link to the surrounding streetscape are encouraged.

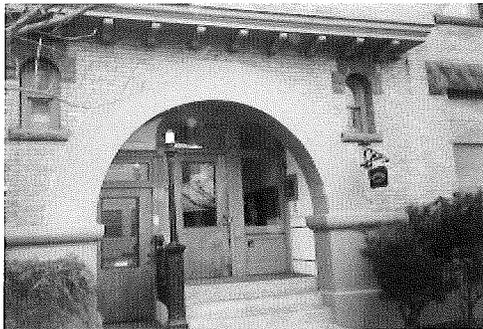


Figure 1: Transition between residence and street. Arched, recessed entry.



Figure 2: Contemporary treatment of transition between residence and street.

A-7 Residential Open Space

Locating a significant amount of open space on rooftops is discouraged. Open space at street level that is compatible with established development patterns and does not detract from desired, active street frontages is encouraged. While not characteristic of the historic warehouse, commercial, or apartment development in the area, usable balconies may be appropriate on streets where a more residential character is intended, to provide both open space and visual relief on building facades. In other areas, if balconies are provided, it is preferable that they not be located on street-facing facades, but rather on facades facing the side or rear of the lot, or internal courtyards.

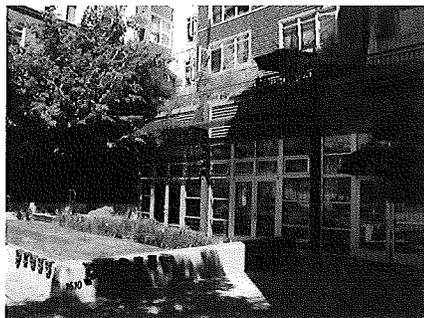


Figure 3: The courtyard of Press Condominiums provides a residential open space amenity on Belmont Avenue E.

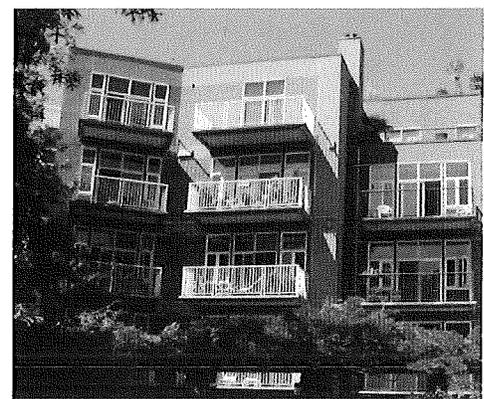


Figure 4: Usable balconies provide visual relief in addition to private open space.

A-9 Location of Parking on Commercial Street Fronts

Garage entry ways facing the street should be compatible with the pedestrian entry to avoid a blank façade. Steel mesh is a preferred alternative to solid doors.



Site Planning

location of parking on commercial street fronts

corner lots

A-10 Corner Lots

Buildings on corner lots should reinforce the street corner. To help celebrate the corner, pedestrian entrances and other design features that lend to Pike/Pine's character may be incorporated. These features include architectural detailing, cornice work or frieze designs.

The following corner sites are identified as Pike/Pine gateways (see Map 3, page 4).


- Pike/Boren: southeast corner
- Melrose/Pine: northeast corner
- 12th/Pike intersection
- 12th/Pine intersection
- Madison: between 11th/12th
- Madison entries onto Pike and Pine

Two examples of projects that incorporate architectural materials and detailing that celebrates the corner are shown below:

Figure 5: Recent development



Figure 6: Neighborhood icon building

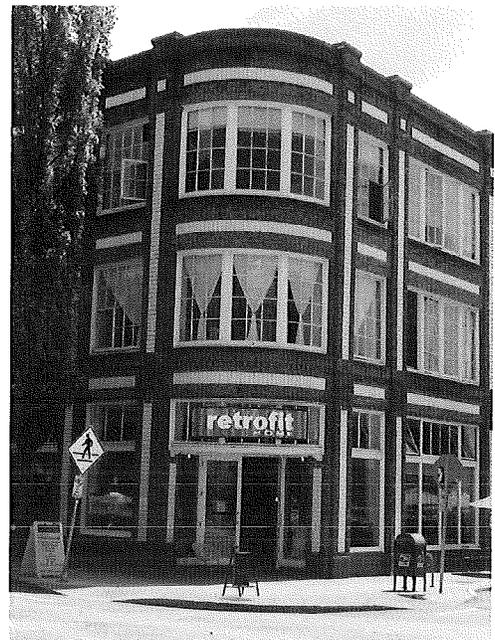



Pike/Pine Urban Village

Gateways

Legend


- Gateway
- Pike/Pine Urban Village Boundary
- Parcel
- Zone Boundary
- Park



0 125 250 Feet

No warranties of any sort, including accuracy, fitness, or merchantability accompany this product.

Copyright 2010 City of Seattle Prepared by DCLU-GIS

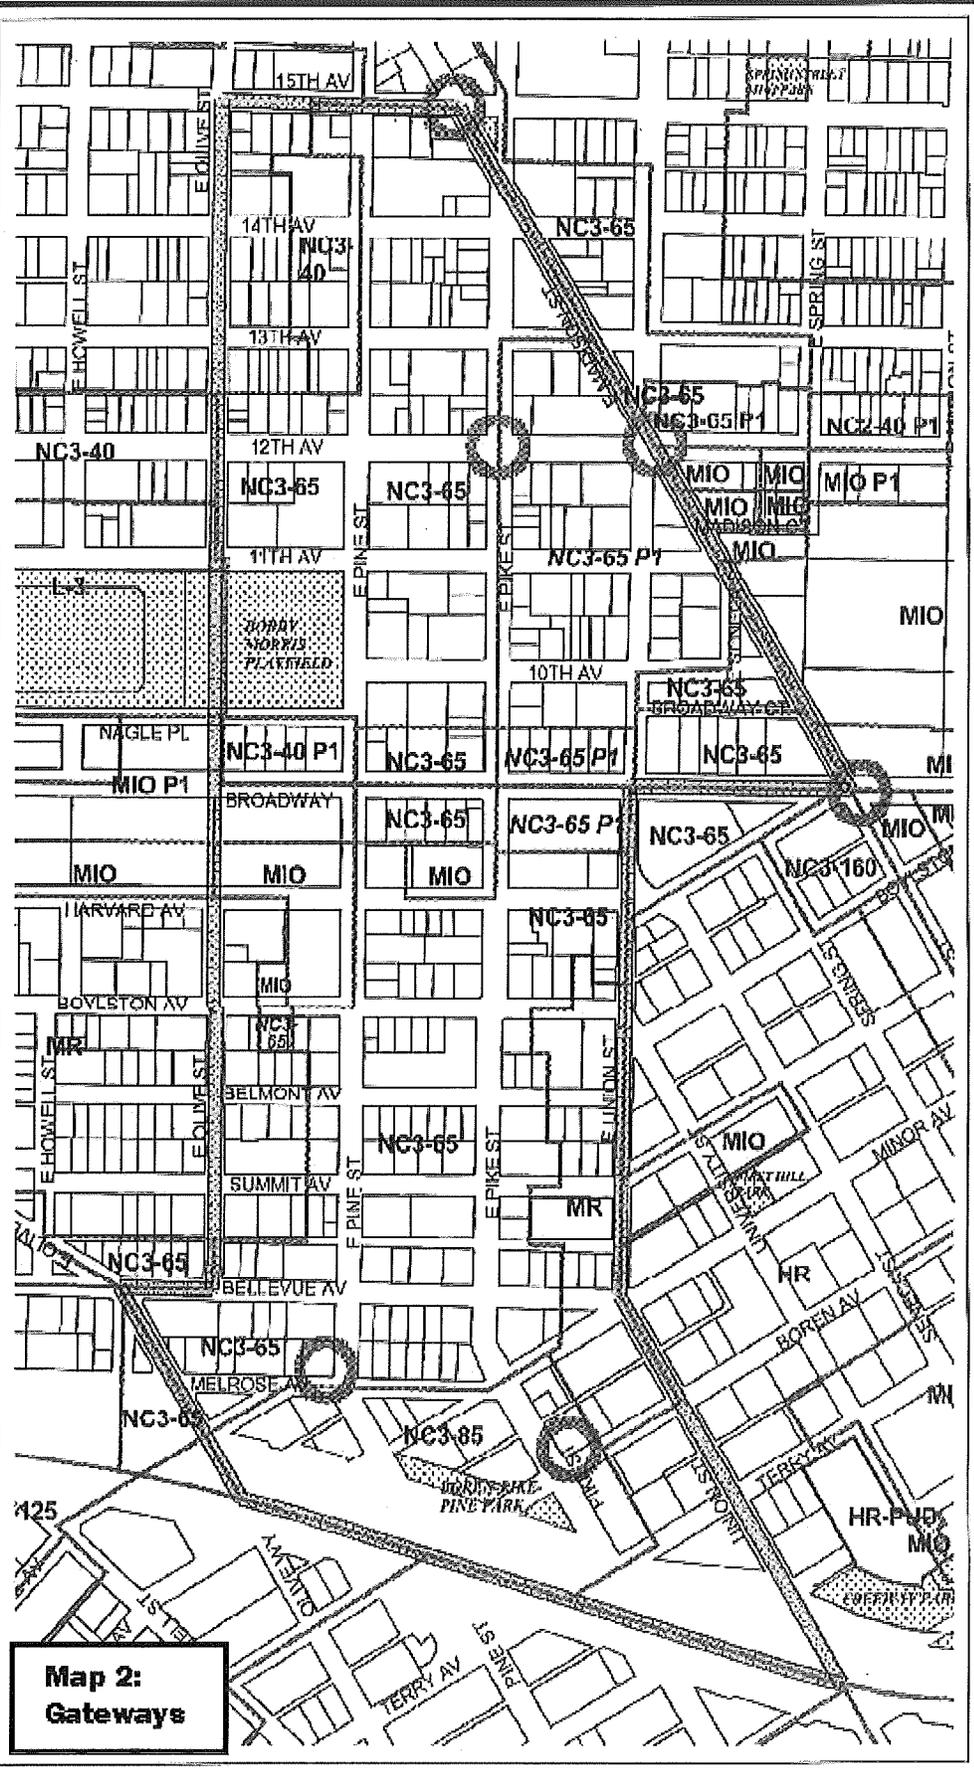

**Map 2:
Gateways**

B. HEIGHT, BULK AND SCALE

B-1 Height, Bulk, and Scale Compatibility (citywide design guideline)

B-2 Pike/Pine Neighborhood Scale and Proportion

New buildings should, in general, appear similar in height, mass, and scale to other buildings to maintain the area's visual integrity and unique character. Although current zoning permits structures to exceed the prevailing height and width of existing buildings in the area, structures that introduce increased heights, width and scale should be designed so their perceived scale is compatible with the existing neighborhood character. The following guidelines address scale and proportion for new structures.

B

Height, Bulk and Scale

a. Design the structure to be compatible in scale and form with surrounding structures.

One, two, and three-story structures make up the primary architectural fabric of the neighborhood. Due to the historic platting pattern, existing structures seldom exceed 50 to 120 feet in width or 100 to 120 feet in depth. Structures of this size and proportion have been ideal for the small, locally owned retail, entertainment, and restaurant spaces that have flourished in this neighborhood. The actual and perceived width of new structures should appear similar to these existing structures to maintain a sense of visual continuity.



Figure 7: While taller than its neighbor, because of its fenestration, width and depth, the new structure that is consistent with the rhythm of other development on the block and is compatible in scale with its neighbors.

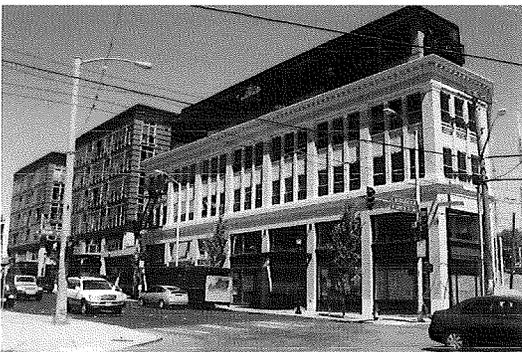


Figure 8: Upper story setbacks maintain street level proportions.

- Respect the rhythm established by traditional facade widths.

Most structure widths are related to the lot width. Typically, structures are built on one lot with a width of 50 or 60 feet; or on two combined lots with a width of 100 or 120 feet. If a proposed development is on a lot that is larger than is typical, it may be necessary to modify the rhythm of the building to maintain the existing scale at the street. Even in older buildings that may be massive, the mass is typically broken up by a rhythm of bays, humanizing the scale of the structure.

- Relate the height of structures to neighboring structures as viewed from the sidewalk.

If a proposed structure is taller than surrounding structures, it may be necessary to modify the structure height or depth on upper floors to maintain the existing scale at the street, especially for larger developments.

- Consider full or partial setbacks of upper stories to maintain street-level proportions.

Given the greater width and height possible for new structures, a more compatible massing may be achieved if portions of the upper floors set back from the street, with other portions extending to the street lot line, creating setbacks at intervals that reflect the typical facade widths of existing structures.

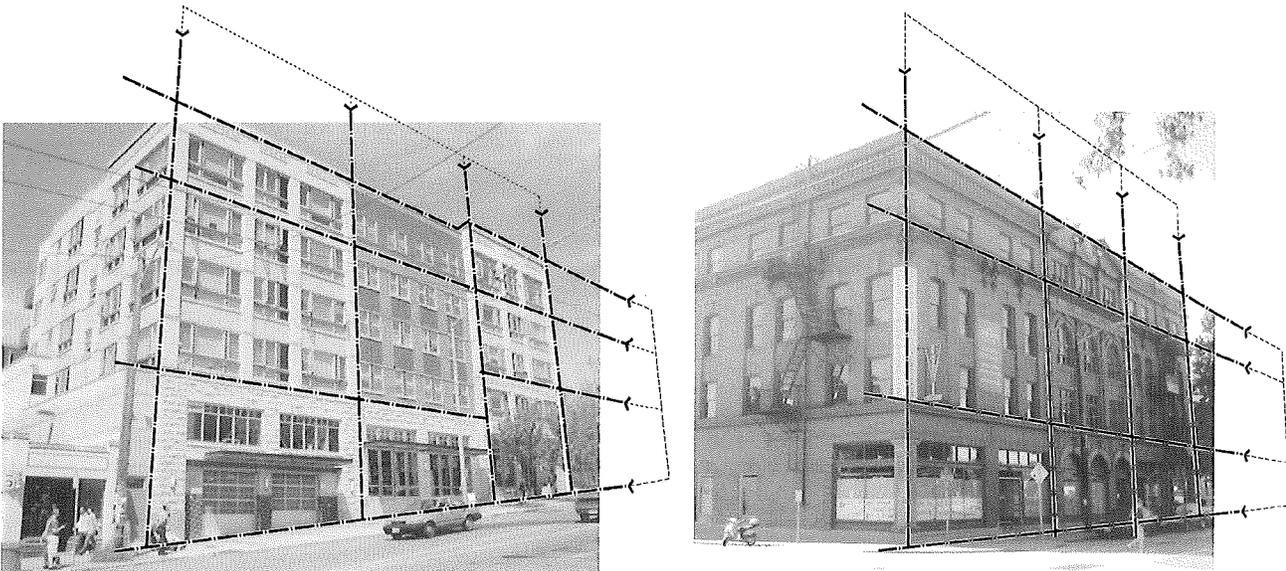


Figure 9: The rhythm established by the neighborhood's original platting and early development provides the basis for determining an appropriate scale relationship between new and old. These illustrations show how the vertical and horizontal treatment of the facades in both an older and more recent building express the prevailing width and height patterns in larger structures.

b. Relate the scale and proportions of architectural features and elements to existing structures on the block face to maintain block face rhythm and continuity.

- Align architectural features with patterns established by the vernacular architecture of neighborhood structures to create visual continuity.
- Use building components that are similar in size and shape to those found in structures along the street from the auto row period.
- Keep the proportions of window and door openings similar to those of existing character structures on the block or in the neighborhood.
- Use windows compatible in proportion, size, and orientation to those found character structures in the surrounding area..



Height, Bulk and Scale

c. Address conditions of wide or long structures.

- For project sites that are wider than usual, articulate the facade to respect traditional façade widths. For example, a facade may be broken into separate forms that match the widths of surrounding structures. This articulation should be substantive, and not merely a surface treatment.
- Employ variations in floor level façades, roof styles, architectural details, and finishes to break up the appearance of large structures.
- Incorporate design features to create visual variety and to avoid a large-scale, bulky or monolithic appearance.
- Consider a street-facing courtyard to minimize the bulk of structures on streets intended to have a residential character.
- Consider stepping back upper stories of structures on larger sites to allow light filter through multiple levels and to create architectural variety.

d. For structures that exceed the prevailing height, reduce the appearance of bulk on upper stories to maintain the established block face rhythm.

Consider the character of the existing block face when determining the appearance of the upper story elements. Whether the upper and lower floors of a structure look different or the same may depend upon the complexity of the existing structures on the block.

- Use the prevailing structure width to create an upper story massing rhythm.
- Break the structure into smaller masses that correspond to its internal function and organization.
- Use changes in roof heights to reduce the appearance of bulk.
- For new structures that are significantly taller than adjacent buildings, especially on larger lots, consider upper floor setbacks of at least 15 feet from the front facade to reduce the perceived height. However, slender forms such as towers and dormers that extend toward the front facade may add visual variety and interest to the setback area.



Figure 10: Through the use of setbacks, courtyards or other interruptions in the street-facing facade, wider structures can relate better to established scale conditions.

e. Design the first floor façade to encourage a small-scale, pedestrian-oriented character

- Visually separate the ground floor spaces to create the appearance of several smaller spaces 25 feet to 60 feet wide.
- Repeat common elements found in neighborhood commercial buildings, such as clearly defined primary entrances and large display windows.
- Provide generous floor to ceiling heights on the ground floor with a high degree of transparency.
- Consider variations in the street-level facade, such as shallow recesses at entries or arcades, to add variety.



Height, Bulk and
Scale

B-3. Integration of Character Structures in New Development (Supplemental guidance especially for properties located within the Pike / Pine Conservation Overlay District.)


Within the Pike/Pine Conservation Overlay District, a project can gain height and floor area by retaining a character structure (defined as a structure that is at least 75 years old) on the lot as part of a new development. The Code requires all portions of the new structure above the character structure to set back a minimum of 15 feet from all street facing facades of the character structure, unless the applicant demonstrates that a departure from this standard will result in a better relationship between the new and existing portions of the project. Section B.II provides design guidance for achieving a desirable relationship between the character structure and new portions of the project. The goal is to design a project that complements the character structure and other structures on the block, even while displaying an individual design. These guidelines are to be used in conjunction with Section B.VI, which addresses the treatment of character structures.

a. Develop a design Concept

Consider different approaches for expressing the relationship between the character structure and new portions of the project. To avoid a superficial design treatment, the new project should not mimic the style of the character structure inappropriately. Approaches to consider include:

- **Contrast:** Design the new addition in a manner that provides differentiation in materials, color, ornamentation and detailing so that the new work does not imitate the character structure, but still responds to the essential elements of scale and character. For example, if the character structure provides a solid, sturdy base, the additional upper floors could have a high degree of transparency and glazing to give them an appearance of lightness.
- **Transition:** Provide a transition in form and character between the new and old portions of the project. The project's composition could present the character structure as one element, with part of the new structure accommodating a design transition between the character structure and portions of the new structure that have a distinct identity.
- **Background:** Design new portions of the project as a backdrop to the character structure to minimize the impact on the character structure and emphasize its role as an established element of the streetscape. Also, it is not uncommon for older buildings to have been constructed in a manner that would have anticipated future expansions. A successful blending of the original and new portions of the project may be achieved through a skillful use of architectural elements and materials inspired by the original design and function of the character structure.

In addition to choosing a design concept as outlined in subsection a, new projects that seek a departure from the 15 foot setback requirement must comply with the guidelines in subsection B1 and the following guidelines b through f:



Height, Bulk and Scale

b. Do not overpower the character structure.

Design the size, scale, massing, and proportions of the new structure to be compatible with the character structure.

- Use siting, setbacks, structure orientation, massing, and rhythm, both at the street level and on floors above, to maintain a strong presence of the character structure in the streetscape.
- Respect the scale of the existing character structure and avoid new construction that appears to be an oversized expansion of the original design.



Figure 11: In this successful example, structures to the left, right, and above the center structure are additions.



Figure 12: From this vantage point on the sidewalk, the upper story addition is not visible from the street, due to its setback.

c. Express the relationship between the character structure and new portions of the project.

- Identify distinctive features of the character structure that can be emphasized or expressed in the new structure, such as: building orientation, corner treatments, massing characteristics, stacking of floors, special treatment of entries, fenestration patterns, changes in the structural spacing or rhythm of bays, or other special elements.
- Design the new structure to draw attention to significant features of the character structure to maintain or increase their importance in the building's overall composition.
- Emphasize important elements of the character structure and design the new structure so that it does not compete with those elements, but rather strengthens or provides a backdrop to them.

d. Emphasize the streetscape.

The street level is the portion of the structure that pedestrians experience most directly and is most critical to maintaining a sense of continuity between the character structure and the new project.

- Maintain the original aspects of the character structure's street level design and function as much as possible.
- Consider how elements of the character structure's original design can be adapted to the functions of the new structure, such as major entries to the structure, public areas and internal circulation, service access, and ground floor uses that are oriented primarily to the street.

B

Height, Bulk and
Scale

e. Align features of the character structure with features of new portions of the project.

The alignment of architectural features and elements in the new and existing portions of the project creates visual continuity and establishes a coherent visual context.

- Design facades to reinforce the patterns of the character structure and express the connection between the new and old portions of the project.

f. Consider design treatments that anchor the new structure to the streetscape.

As part of a new project, a character structure can help integrate new development with the existing neighborhood fabric. However, it may also be desirable for the new structure to emphasize its own identity in the streetscape by directly connecting to the street level, or through other measures that strengthen the new structure's presence on the street.

- When adjacent to the character structure, it may be possible for elements of the new structure to successfully surround or "wrap" the character structure to anchor the new structure to the character structure and the streetscape.
- When new additions are above the character structure, it may be desirable for portions of the new structure to extend to the street to better integrate it with the streetscape and avoid the appearance of "floating" as an unrelated element above the character structure.



Figure 13: While the new structure is built above an existing character structure, the portion of the new structure that extends to the street helps to anchor the project to the streetscape.

B-4. Small Lot Development (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

The Pike/Pine Conservation Overlay District encourages development on small lots of 8,000 square feet or less by exempting the residential floor area in the project from the FAR limit. While the scale of development on small lots is compatible with the existing developed context, such projects may still present design challenges that require attention to ensure the best fit between the new and the old at any given site. New structures on small lots should maintain the character of the Pike/Pine neighborhood, and not use the small size of the lot as a reason to compromise maintaining compatibility with the character of the area.

a. Consider the project's impact on the street environment

- Maintain solid massing of the street wall.
- Site driveways and design vehicular garage entrances so that they do not dominate the street front.
- Orient the structure's street level uses, building entrances, and service areas so that street-level priorities for commercial and pedestrian activity are not compromised.

b. In order to maintain a continuous street wall, front setbacks are discouraged

"T" or "L" shaped structures that maintain a continuous street wall while allowing setbacks from shared lot lines on the interior of the lot are preferred over setbacks of upper floors fronting the street.

Ground level front setbacks may be appropriate in limited circumstances to enhance the project's relationship to the pedestrian environment by providing such features as wider sidewalks, space for residential entries, or other pedestrian amenities.

In some circumstances, an upper level front setback may be appropriate to better relate a taller new structure to the prevailing height of adjacent character structures.



Height, Bulk and Scale

c. Provide appropriate rear and side setbacks

Side and rear setbacks are most important on the upper floors of portions of the structure that do not face the street.. Maintaining a continuous street wall to preserve the streetscape character at ground level generally takes precedence.

- Provide setbacks from side and rear lot lines to maximize access to light, air, and usable space between structures and to minimize exposed blank walls.
- Avoid blank walls on the sides of structures that abut neighboring lots, while recognizing the potential for abutting development in the future. In general, blank walls are discouraged.
- Use the rear of the lot for parking or other open areas. Rear setbacks may be used to create light courts, seating areas, or courtyards.



Figure 14: Successful small lot development on Pike Street.

B-5. Through-Block Development

While most blocks in the Pike/Pine neighborhood lack alleys, development seldom extends across a full block from street to street. The predominant development pattern is comprised of individual structures that front on the street and extend no deeper than mid-block. New developments on through block lots should be carefully designed for compatibility with this established fabric.

a. Avoid monolithic development on through lots.

- Observe in new through-block projects the original platting and development pattern, which is generally characterized by structures limited to a half-block in depth, with widths of 50 to 60 foot increments along the street.

b. On blocks bounded by designated principal pedestrian streets, take advantage of opportunities to include through-block connections.

Through block connections can extend a fine-grained pedestrian environment into the interior of the block, offer a transition between public and private spaces, and unite both sides of the block face. As more intensive development occurs over time, through block connections can contribute to a more complex, intimate pedestrian environment.

- Make through-block connections clearly identifiable, accessible, and attractive.
- Create focal points to draw pedestrians into and along through-block pathways.
- Encourage abutting uses that will promote public access into through-block connections during appropriate hours to activate space.
- Ensure a porous façade on through-block pedestrian connections by providing frequent openings and breaks to provide visual interest, and to allow free movement of pedestrian traffic through the block face.
- Consider opportunities for open space and other amenities in block interiors, such as gardens, courtyards, fountains, lighting and seating to unite different uses in the block.

B

Height, Bulk and
Scale

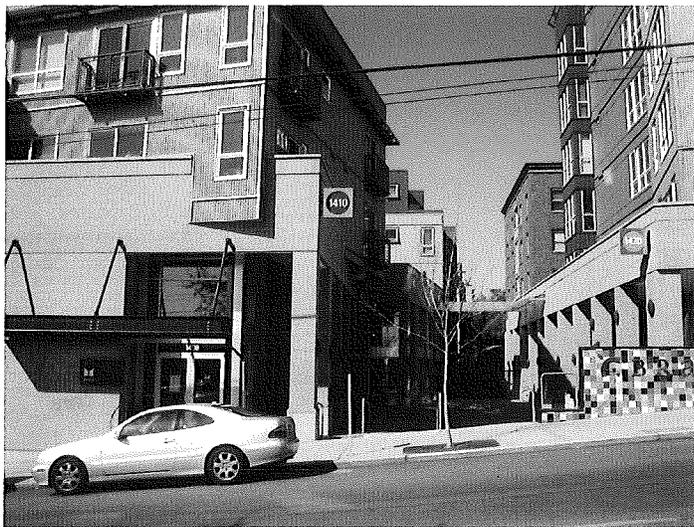


Figure 15: In appropriate circumstances, a through-block corridor can contribute to a more compatible sale of development while creating opportunities to expand the pedestrian network.

c. Capitalize on opportunities to provide utility functions in through-block development

Several of the through-block sites in the Pike/Pine neighborhood are in the vicinity of 10th, 11th, and 12th Avenues. Grade changes between these streets present opportunities for through-block development that may be designed to include drop-off, parking, and service and delivery areas within the development in a manner that efficiently accommodates these functions and minimizes conflicts with pedestrian activity along block perimeters.

B-6. DEVELOPMENT IN AREAS LACKING A WELL-DEFINED CHARACTER (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

Some areas where the Pike/Pine Conservation Overlay District was expanded during 2009 lack an apparent overriding visual character, or the character may be mixed or changing. When no clear pattern is evident, new development should help define and unify the existing visual context and contribute positively to the Pike/Pine neighborhood character. Designs should draw on the best features of surrounding buildings, or of the surrounding neighborhood, to create a more complex, intimate pedestrian environment.


a. Design structures to help define, unify and contribute positively to the existing visual context.

New structures should enhance pedestrian and visual connectivity along streets oriented to the north and south, including connections to the 12th Avenue Urban Center Village across Madison Street.

- Capitalize on excess and undefined right-of-way areas, including overly wide street surfaces on side streets, to enhance pedestrian circulation and gathering, and for landscaping and other streetscape improvements.
- Encourage streetscape treatments that retain the informal character of side streets, such as shared pedestrian and vehicle loading areas, lower curb heights and varied curb lines, and textured paving materials.
- Include high ceilings in the ground floor spaces of new structures that are consistent with older character structures in the neighborhood. Floor to ceiling heights of at least 15 feet are encouraged.

B-7. Conservation of Character Structures (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

The Pike/Pine Conservation Overlay District encourages preservation and enhancement of the unique character of the Pike Pine neighborhood. A high priority for achieving this objective is the conservation and reuse of existing character structures. The Overlay District includes both exceptions that apply when a character structure is retained and incentives for conserving and reusing these structures. This Section VI provides guidance for appropriate conservation of character structures.



Height, Bulk and Scale

a. Maintain the architectural integrity of the character structure

- Avoid all but minor changes to the primary elevation(s) of the character structure
- Make a visual distinction between old and new: new construction should be distinguishable from the character portion.
- Keep the addition compatible with the character structure in form, scale, massing, and proportion.
- Do not obscure significant features of the character structure.

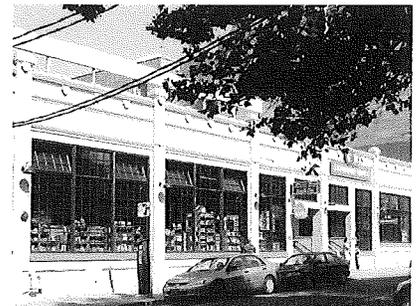
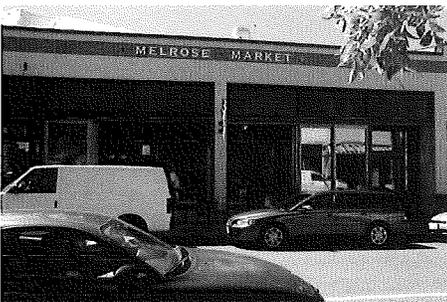


Figure 16: Renovated character structures that have retained character-defining elements.

b. Maintain Character-Defining Elements

- Identify the form and detailing of those architectural materials and features important to defining the structure's character and that should be retained. Character-defining elements may include:
 - Exterior materials, such as masonry (especially brick), wood, and metal;
 - Exterior features and details such as: entrances, fully-glazed storefront windows and expansive glazing, parapets, cornices, roofs, windows, ornamentation (such as terra cotta cladding), signage (including emblems and embossed building names) and color;
 - Structural characteristics, including expressions of interior space on the structure façade, and structural elements defining organization, architectural composition, rhythm, and massing; and
 - Both horizontal and vertical lines that help define the rhythm of the character structure, often by marking a repeating bay.
- Retain, repair, rehabilitate or replace character-defining elements of the character structure, using generally accepted methods.
- Avoid adding materials or features that were not historically part of the character structure.

c. Recognize the priority for maintaining the original floor-to-ceiling heights in character structures, especially for the ground floor and for features visible from the exterior.

- Ensure that double-height windows on street-facing facades are visible and apparent from the street.
- Avoid inserting a "new" floor within a double-height ground level unless:
 - 1) The full height of the double height window is not obstructed for a sufficient depth from the structure's façade (generally, a depth of at least 30 feet) to maintain a sense of the original space as viewed from the street, and the visual expression of the structure in the double height storefront's facade is not substantially altered by including the new floor; or
 - 2) Characteristics of the original architecture or structure lend themselves to this modification. For example, where a mezzanine existed in the original structure, or where slope changes or changes in window placement in the character structure would minimize the perception of the new floor.



Height, Bulk and Scale



Figure 17: High floor-to-ceiling heights as character defining element.

d. Sensitive locate additions so they do not dominate the appearance of the character structure.

The Pike/Pine Conservation District Overlay encourages additions that enable reuse and preservation of the character structure. The compatibility of an addition is dependent on the design of the original building, its site and immediate context.

- Consider the size and location of the addition in order to minimize its visibility from the street and its impact on light to adjacent structures.
- Place the major mass of the addition on an inconspicuous side or rear elevation so the addition does not radically change the form and character of the character structure.
- Consider setting additional stories well back from the roof edge to ensure that the character structure's proportions and profile are not radically changed.
- For additions that abut a character structure, retain the original proportions, scale, and character of the main facade. Consider a slight setback from the principal façade.


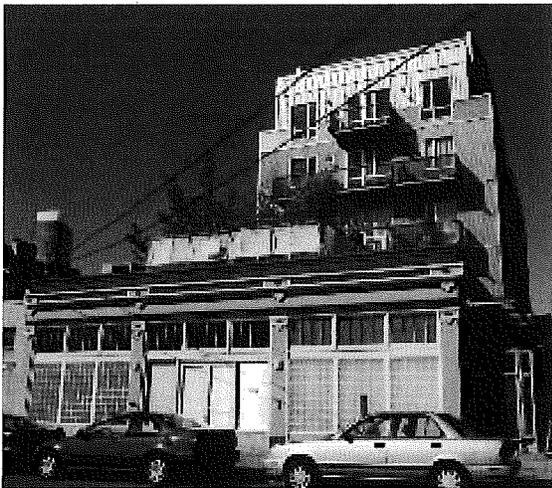


Figure 18: This addition is placed to the rear of the character structure and set well back from the street front, retaining the original proportions, scale and character of the main facade.



Height, Bulk and
Scale

C. ARCHITECTURAL ELEMENTS AND MATERIALS



Architectural Elements and Materials

architectural context



Figure 18:
Context—pilasters, arched terra cotta cladding, parapet

C-1 Architectural Context

The Pike/Pine “vernacular” architecture is characterized by the historic auto row and warehouse industrial buildings featuring high ground-floor ceilings, articulated ground-floor commercial space, display windows, detailed cornice and frieze work, and trim detailing.



Figure 20:
Context—light industrial signage and building design; tall windows



Figure 21:
New construction—large windows, balconies provide visual modulation.

Figure 22: Signature Pike/Pine architectural styles

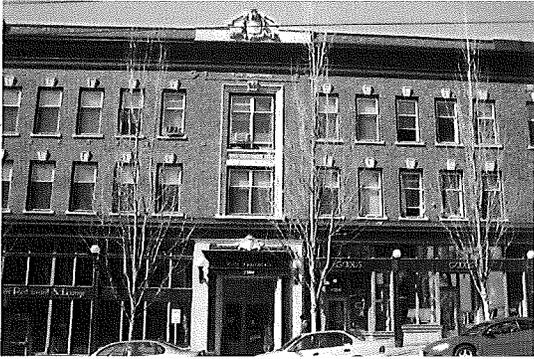


Figure 22a: Villa Apartments

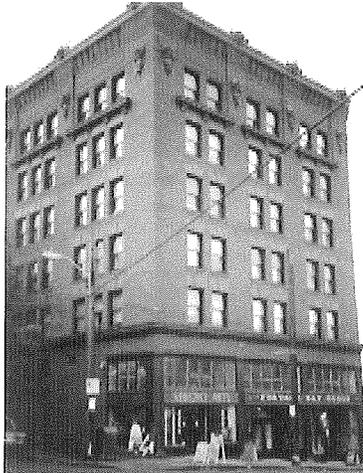


Figure 22b: Wintonia

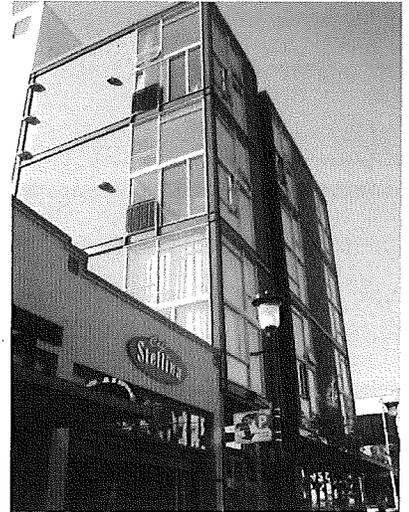


Figure 22c: Agnes Lofts

New buildings should echo the scale and modulation of neighborhood buildings in order to preserve both the pedestrian orientation and consistency with the architecture of nearby buildings. Architectural styles and materials that complement the light-industrial history of the neighborhood are encouraged.

Examples of preferred elements include:

- Similar building articulation at the ground level;
- Similar building scale, massing and proportions; and
- Similar building details and fenestration patterns.

Taking architectural cues from the following developments is encouraged:

- Villa Apartments (NE Pike/Boren);
- Wintonia (SW Pike/Minor);
- NW Boylston/Pine
- Pike Lofts (SW Pike/Bellevue);
- Schuyler (SW Pike/Boylston);
- 615 E Pike Condominiums (SW Pike/Boylston);
- Monique Lofts (NW Pike/11th);
- 1101 E Pike Street (SE Pike/11th);
- Agnes Lofts (SW Pike/13th);
- Elysian Brewery (SE Pike/13th);
- Oddfellows (SE Pine/10th);
- Trace Lofts (12th/between Pike and Madison)
- 1100 Union



Figure 22d: 1100 Union

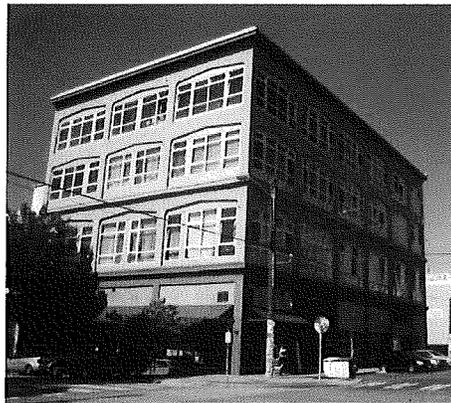


Figure 22e: Monique Lofts


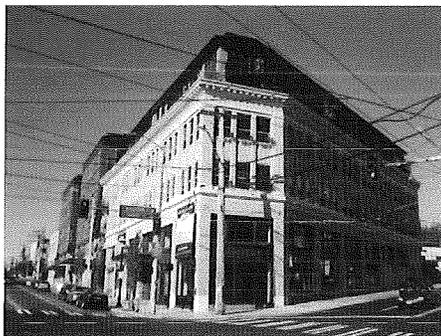


Figure 22f: Trace Lofts



Architectural Elements and Materials

human scale

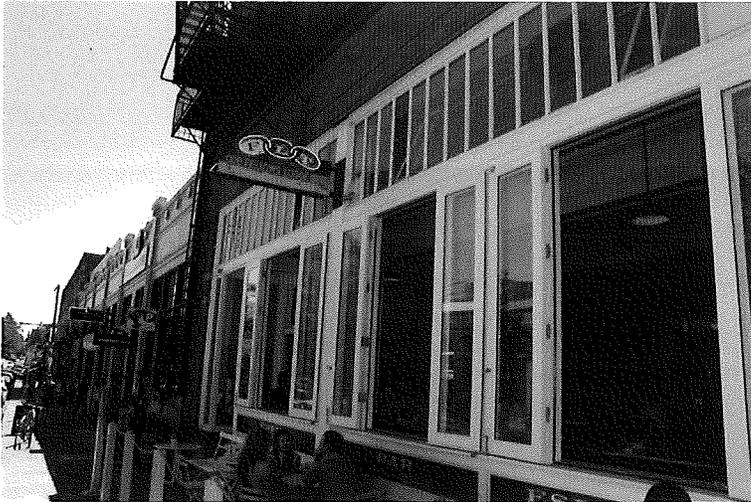


Figure 23: Sidewalks as open space



Architectural Elements and Materials

architectural context



Figure 24: Retail entryway—transparent windows, floor-to-ceiling, unique signage



Figure 25: Transparent windows, retail modules and consistent entrances lend to human-scaled streetscape.

C-3 Human Scale

In order to achieve good human scale, the existing neighborhood context encourages building entrances in proportion with neighboring store-front developments.

In addition to the Citywide Design Guidelines, developments should successfully contribute to the vitality of the street level and pedestrian scale relationships to the right-of-way. Thus, the design of the ground floor of new developments should include:

- Pedestrian-oriented architectural elements
- A rhythm of building modulation comparable or complimentary to adjacent buildings
- Transparent, rather than reflective, windows facing the street

This is important throughout the neighborhood. It is preferred that ground floor development echoes the patterns established by adjacent buildings in this area, including high bays and glazing along the ground floor. To this regard, cues can be taken from the Oddfellows and Elliott Bay Bookstore buildings on 10th Avenue E. between Pike and Pine and from the buildings on the south side of Pike Street between Boylston and Harvard Avenues.

C-4 Exterior Finish Materials

New development should complement the neighborhood's light-industrial vernacular through type and arrangement of exterior building materials. Preferred materials and approaches include:

- Brick, masonry, textured or patterned concrete, true stucco (Dryvit is discouraged), with wood and metal as secondary or accent materials.
- Other high quality materials that work well with the historic materials and style of neighboring buildings
- Limited number of exterior finish materials per building
- High quality glazing and trim as a vital component of exterior finish



Figure 26: Ornamental detailing, decorative trim, parapet, traditional materials, transparency.



Figure 27: Use of modern materials



Architectural Elements and Materials

exterior finish materials

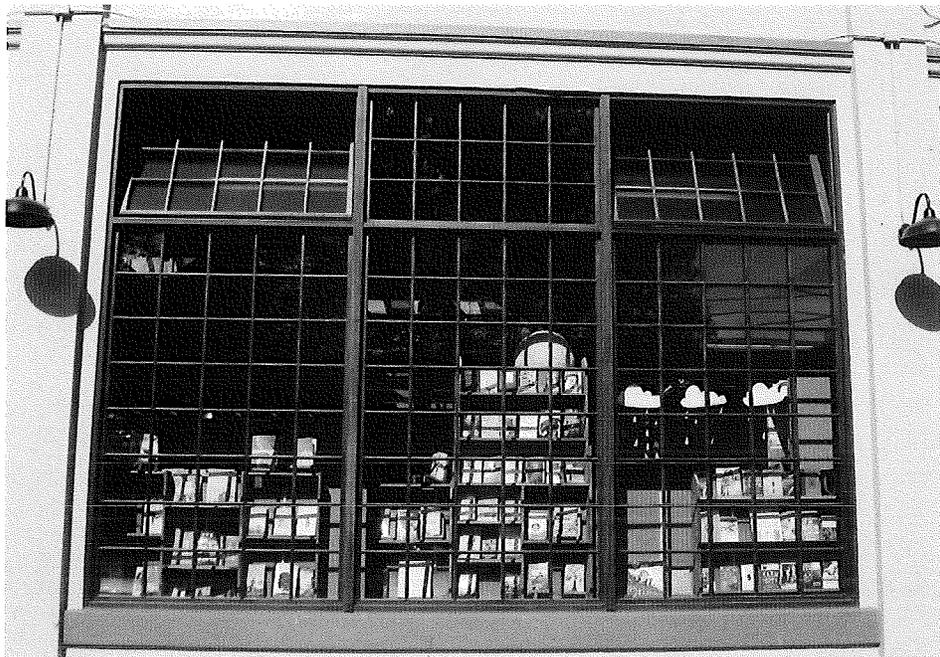


Figure 28: Window trim detailing

D. PEDESTRIAN ENVIRONMENT

D-3 Retaining Walls

Where retaining walls are unavoidable near a public sidewalk, a textured surface or inlaid material is encouraged.

D-4 Design of Parking Lots Near Sidewalks

Screening of Parking

For secured surface parking lots, the use of cyclone wire or chain-linked fencing should be avoided and instead, the artistic use of mesh fencing, fabricated iron, decorative hardscape and landscape materials including perimeter trees are encouraged.

D-5 Visual Impact of Parking Structures

Incorporate vertical landscaping (trellises) or artwork as screens where feasible.

Parking structures should provide commercial or other pedestrian-oriented uses at street level.

D-7 Personal Safety and Security

Lighting installed for pedestrians should be hooded or directed to pathways leading towards buildings.



Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security

D-8 Signs

a. Promote the pedestrian environment

- Signs should be oriented toward and promote the pedestrian environment
- Signs that are placed at the height and are of a scale to attract drivers, instead of pedestrians, are not consistent with the neighborhood's special character.
- Window signs should not cover a large portion of the window so as not to be out of scale with the window, storefront or façade.

b. Reflect the special neighborhood character

- Signs should complement and not detract from the special character of the Pike/Pine neighborhood. Key elements of this character include: signs associated with a concentration of small, local businesses, particularly businesses related to the arts; activities oriented to the pedestrian, including uses that extend activity well into the evening; a cohesive collection of early twentieth century commercial buildings with distinctive architectural characteristics; and a predominance of unique and diverse signs, instead of standardized signs, that advertise the availability of goods and services.
- Signs should relate physically and visually to their location and uniquely reflect the character and nature of the business they advertise.



Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security

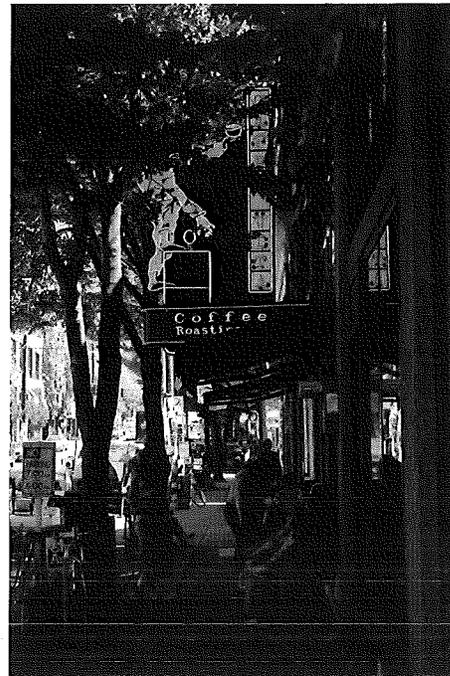
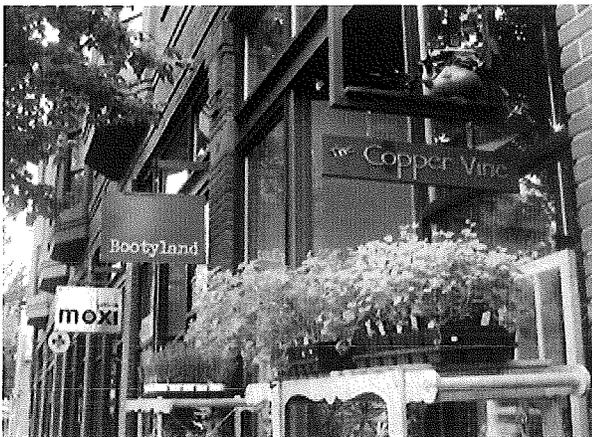


Figure 29: The best examples of signs appropriate for the Pike/Pine neighborhood are those for small, independent retail shops or restaurants. These reveal creativity and individual expression, and along a block, can be part of the rhythm that attracts the pedestrian to walk there.

- Signs should not hide, damage, or obstruct the architectural elements of the building; and their design and placement should be well integrated with the design and style of the structure, especially when attached to a character structure.

D

Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security



Figure 30: A simple, straightforward sign compatible with the structure's design.

- Signs should be designed as distinctive additions to the streetscape and should not appear mass-produced
- Backlit signs are generally inconsistent with the special character of the neighborhood, particularly when they are a standardized design that creates a generic look.

E. LANDSCAPING

E-2 Landscaping to Enhance the Building and/or Site

The creation of small gardens and art within the street right-of-way is encouraged in the Pike/Pine neighborhood in order to enhance and energize the pedestrian experience. This is especially desirable for residential and mixed use developments as well as a means to distinguish commercial areas from institutional areas. Providing vertical landscaping, trellises or window boxes for plants is also desirable. Street greening is specifically recommended along the following streets:

- Avenues between Union and Pike Streets, from Minor Avenue on the west to Harvard Avenue on the east;
- Along Bellevue, Summit, Belmont, and Boylston (except from Pike to Pine)
- Union Street from Boren to Broadway
- Avenues between Pike and Olive Streets from 11th Ave. on the east to 14th Ave. on the west including Pine from 14th and 15th and Olive from 11th to 15th (except along 14th Ave. from Pine to Pike)

Permit approval from Seattle Department of Transportation (SDOT) is required in most cases for features placed within the City Right-of-Way and early coordination with SDOT is recommended.



Landscaping

landscaping to enhance the building and/or site



Figure 31: Landscaping that enhances the streetscape at a residential building entrance on Nagle Place.

FISCAL NOTE FOR NON-CAPITAL PROJECTS

Department:	Contact Person/Phone:	DOF Analyst/Phone:
Legislative	Rebecca Herzfeld/684-8148	Not applicable

Legislation Title:

AN ORDINANCE relating to land use and zoning; amending Sections 23.41.010, 23.41.014, 23.55.030, and 23.73.010 of the Seattle Municipal Code, adding a new subsection to Section 23.41.12, approving and adopting revised Neighborhood Design Guidelines for the Pike/Pine Urban Center Village, and amending provisions in the Pike/Pine Conservation Overlay District to better maintain the character of the Pike/Pine neighborhood.

• **Summary of the Legislation:**

This legislation would:

1. Add provisions to the existing Pike/Pine Neighborhood Design Guidelines to better address developments that incorporate “character structures” (defined as buildings 75 or more years old).
2. Revise the current Neighborhood Guidelines, primarily to update the illustrations and examples.
3. When a character structure is located on the site of a proposed new project, require as part of the design review process that the developer evaluate the key architectural elements of the character structure, and provide at least one design proposal that will maintain those elements and the integrity of the character structure.
4. Change the decision-maker from the Director of the Department of Planning and Development to the local Design Review Board when a developer requests a departure from the prescribed method for incorporating a character structure into a new building.
5. Allow an exception from the prohibition against internally-illuminated cabinet signs in the Pike/Pine Conservation Overlay District for signs that are no larger than three square feet.

• **Background:**

Since 2008, Councilmember Rasmussen has been working to develop policies and Land Use Code changes to protect the unique character of the Pike/Pine neighborhood. Last July, the City Council adopted Ordinance 123020, which was the first phase in carrying out this effort. This ordinance expanded the boundaries of the Pike/Pine Conservation Overlay District, limited the scale of new projects, and encouraged new projects to retain existing older buildings (“character structures”) as part of the development site.

In June 2010, Councilmember Rasmussen requested public comment on draft legislation that would update the current neighborhood design guidelines for the Pike/Pine area. This legislation is part of the second phase of work to improve the Pike/Pine Conservation Overlay District regulations. The draft legislation has been revised to reflect many of the suggestions made by the public during the review process, and Councilmember Rasmussen is now proposing it for



Council adoption.

- *Please check one of the following:*

This legislation does not have any financial implications. *(Stop here and delete the remainder of this document prior to saving and printing.)*

This legislation has financial implications. *(Please complete all relevant sections that follow.)*

ORDINANCE _____

1
2 AN ORDINANCE relating to land use and zoning; amending Sections 23.41.010, 23.41.014,
3 23.55.030, and 23.73.010 of the Seattle Municipal Code, adding a new subsection to
4 Section 23.41.12, approving and adopting revised Neighborhood Design Guidelines for
5 the Pike/Pine Urban Center Village, and amending provisions in the Pike/Pine
6 Conservation Overlay District to better maintain the character of the Pike/Pine
7 neighborhood.

8 WHEREAS, in response to the 1991 Pike/Pine Planning Study sponsored and conducted by a
9 coalition of Pike/Pine neighborhood and civic groups, business and property owners, and
10 residents, the Pike/Pine Overlay District was established to preserve and enhance the
11 area's mixed-use character; and

12 WHEREAS, in March 1999, the City Council adopted Ordinance 119413 amending the City's
13 Comprehensive Plan to include key goals and policies from the 1998 Pike/Pine Urban
14 Center Village Plan, which reaffirmed the neighborhood's commitment to mixed-use
15 development, while identifying additional priorities including: 1) sustaining the character
16 of Pike/Pine through implementation of urban design recommendations and policy
17 changes and 2) considering a "conservation district" for the neighborhood; and

18 WHEREAS, in September 2000, the City Council adopted Ordinance 120081 adopting
19 Neighborhood Design Guidelines for the Pike/Pine Urban Center Village; and

20 WHEREAS, in July 2009, the City Council adopted Ordinance 123020, renaming the overlay
21 district the Pike/Pine Conservation Overlay District, expanding its boundaries, and
22 adding provisions that limit the scale of new projects, encourage new projects to retain
23 existing structures as part of a development site, provide spaces for small businesses at
24 street level, and accommodate facilities serving the arts, to further the preservation and
25 enhancement of the unique character of the Pike/Pine neighborhood; and

26 WHEREAS, additional design guidelines for Pike/Pine and greater involvement of the Design
27 Review Board will encourage new buildings and signage that contribute to the character
28 of the Pike/Pine neighborhood and help maintain "character structures" that are
incorporated into new developments;

WHEREAS, the Department of Planning and Development is updating the 15 year old citywide
design guidelines on which all neighborhood design guidelines are based, and this effort
provides an opportunity to reorganize the Pike/Pine Neighborhood Design Guidelines to
match the new citywide format, and to update the illustrations in the Pike/Pine
Neighborhood Design Guidelines; NOW THEREFORE,

BE IT ORDAINED BY THE CITY OF SEATTLE AS FOLLOWS:

THIS VERSION IS NOT ADOPTED



1 Section 1. Section 23.41.010 of the Seattle Municipal Code, which section was last
2 amended by Ordinance 122994, is amended as follows:

3 **Section 23.41.010 Design Review Guidelines**

4 A. The "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended 2006)"
5 and neighborhood design guidelines approved by the City Council and identified in subsection B
6 of Section 23.41.010, provide the basis for Design Review Board recommendations and City
7 design review decisions, except in Downtown, where the "Guidelines for Downtown
8 Development, 1999" apply. Neighborhood design guidelines are intended to augment and make
9 more specific the "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended
10 2006)" and the "Guidelines for Downtown Development, 1999." To the extent there are conflicts
11 between neighborhood design guidelines and the "Guidelines for Multifamily and Commercial
12 Buildings, 1998 (Amended 2006)" or "Guidelines for Downtown Development, 1999", the
13 neighborhood design guidelines prevail.
14
15

16 B. The following Neighborhood design guidelines are approved:

- 17 1. "University Community Design Guidelines, 2000;"
- 18 2. "Pike/Pine Urban Center Village Design Guidelines, ((2000)) 2010;"
- 19 3. "Roosevelt Urban Village Design Guidelines, 2000;"
- 20 4. "Ballard Municipal Center Master Plan Area Design Guidelines, 2000;"
- 21 5. "West Seattle Junction Urban Village Design Guidelines, 2001;"
- 22 6. "Green Lake Neighborhood Design Guidelines, 2001;"
- 23 7. "Admiral Residential Urban Village Design Guidelines, 2002;"
- 24 8. "South Lake Union Neighborhood Design Guidelines, 2005;"
- 25 9. "Northgate Urban Center and Overlay District Design Guidelines, 2003;"
- 26
- 27
- 28

10. Belltown Urban Center Village Design Guidelines, 2004;
11. Wallingford Neighborhood Design Guidelines, 2005;
12. Capitol Hill Neighborhood Design Guidelines, 2005;
13. Greenwood/Phinney Neighborhood Design Guidelines, 2005;
14. Othello Neighborhood Design Guidelines, 2005;
15. North Beacon Hill Design Guidelines, 2006;
16. North District/Lake City Guidelines, 2006;
17. Morgan Junction Neighborhood Design Guidelines, 2007;
18. Upper Queen Anne Neighborhood Design Guidelines, 2009; and
19. Uptown Neighborhood Design Guidelines, 2009.

Section 2. A new subsection E of Section 23.41.012, which section was last amended by Ordinance 123206, is added as follows:

23.41.012 Development standard departures

* * *

E. Departures for retaining character structures on lots in the Pike/Pine Conservation Overlay District. Departures from the conditions in subsections 23.73.010.C.2 and 23.73.010.F.2 when retaining a character structure as part of a new project may be granted if the following conditions are met:

1. The retained portion of the character structure is sufficient to give the appearance of a free-standing structure; or
2. The newly-constructed portion of the project, through vertical or horizontal modulation or other design treatments, generally provides for better integration of the physical



1 appearance and arrangement of interior spaces between the character structure and the new
2 project than would occur through the strict application of subsection 23.73.010.C.1; or

3 3. Additional flexibility is necessary to maintain a character structure on a small
4 development lot that is 8,000 square feet or less in size; and

5 4. The ground story of the character structure can accommodate the elements of
6 the proposed new structure, such as a mezzanine or additional story, while maintaining the
7 original character of the character structure by: retaining sufficient portions of the ground floor
8 that are visible from the street at the original floor to ceiling height, through appropriate
9 placement and design of the new structure, or through other design means that are consistent
10 with the Pike/Pine Urban Center Design Guidelines.
11

12 Section 3. Subsection B of Section 23.41.014, which section was last amended by
13 Ordinance 123206, is amended as follows:
14

15 **23.41.014 Design review process**

16 * * *

17 B. Early Design Guidance Public Meeting.

18 1. Following a preapplication conference, and site visits by Design Review Board
19 members assigned to review a proposed project, an early design guidance public meeting with
20 the Design Review Board shall be held.
21

22 2. The purpose of the early design guidance public meeting shall be to identify
23 concerns about the site and the proposed project, review the design guidelines applicable to the
24 site, determine neighborhood priorities among the design guidelines, and explore design
25 concepts and/or options.
26

1 3. At the early design guidance public meeting, the project proponents shall
2 present the following information:

3 a. An initial site analysis addressing site opportunities and constraints, the
4 use of all adjacent buildings, and the zoning of the site and adjacent properties; and

5 b. A drawing of existing site conditions, indicating topography of the site
6 and the location of structures and prominent landscape elements on or abutting the site (including
7 but not limited to all trees (~~((six (6)))~~ 6 inches or greater in diameter measured (~~((four and one half~~
8 (~~4½~~)) 4.5 feet above the ground, with species indicated); and

9 c. Photos showing the facades of adjacent development, trees on the site,
10 general streetscape character and territorial or other views from the site, if any; and

11 d. A zoning envelope study (~~((which))~~ that includes a perspective drawing;

12 and

13 e. A description of the proponent's objectives with regard to site
14 development.

15 f. In the Pike/Pine Conservation Overlay District established in Section
16 23.73.004, if a character structure is located on the same lot as a proposed project, the applicant
17 shall:

18 1) Analyze the features that define the developed context of the
19 structures located on the block front where the project is proposed, and on all block fronts facing
20 the project;

21 2) Evaluate the relationship of the character structure's key
22 architectural and structural elements to the developed context, and how the new project will
23 respond to this relationship; and

THIS VERSION IS NOT ADOPTED



1 C. Retaining character structures on a lot. A 25 percent increase in the floor size limit
2 above 35 feet in height is permitted for projects that incorporate a character structure on the same
3 lot, either as a whole structure or as a portion of a structure, pursuant to the following provisions.

4 1. No increase in floor size is permitted under the provisions of this subsection for
5 a project that will result in the demolition of a designated Seattle Landmark or a character
6 structure identified on Table A for 23.73.010.

7
8 2. For a project that incorporates portions of a character structure, the following
9 conditions shall be met:

10 a. All street-facing facades of the character structure are retained; ~~((and))~~

11 b. All portions of the new structure above the height of the street facing
12 facades of the character structure are set back a minimum of 15 feet from all street property lines
13 that abut the character structure ~~((-)); and~~

14 c. The original floor-to-ceiling height of the ground story is maintained.

15
16 ~~((3. As an alternative to the provisions of subsection 23.73.010.C.2, the Director
17 may, as a Type I decision, waive or modify the conditions of this subsection, based on the
18 following:~~

19
20 a. ~~The portion of the structure that is retained is sufficient to give the
21 appearance of a free-standing building; or~~

22 b. ~~The newly constructed portion of the project, through vertical or
23 horizontal modulation or other design treatments, generally provides for a better integration of
24 the existing structure with the new project, in terms of both physical appearance and the
25 arrangement of interior spaces, than would otherwise occur through the strict application of the
26 standards in subsection 23.73.010.C.1; or~~

e. ~~Additional flexibility is necessary to maintain a character structure on a small development lot that is 8,000 square feet in size or less.))~~

((4))3. Any floor area in a new portion of the structure above 35 feet in height that is within the area of the original footprint of the character structure and is separated from the street along all street frontages by the original facades of the character structure is not included in the calculation of the floor area subject to the floor size limit.

((5))4. A project that is granted an increase in floor size under the provisions of this subsection 23.73.010.C shall maintain the character structure, or portions of the character structure, both interior and exterior, in good condition and repair and in a manner that preserves unique features and characteristics for the life of the project. Any increase in floor size permitted pursuant to this Section 23.73.010.C shall not be combined with any increase in floor size permitted pursuant to Section 23.73.010.B.

Table A for 23.73.010
Identified Character Structures ¹

Address	Historic Name	Common Name
1519 12th Avenue	Overland Pacific Building	Police Department East Precinct
300 E. Pine Street	Butterworth Mortuary	Butterworth Mortuary
1501 Broadway	Broadway State Bank	Tully's
1205 E. Pine Street	McAlpin-Schreiner Company	Foley Sign Company
1021 E. Pine Street	Colyear Motor Sales Company	REI/Velo Bike
901-911 E. Pike Street	Tyson Oldsmobile Company	Frame Central
1217-1221 E. Pike Street	S. L. Savidge	Elysian Brewery
915-919 E. Pike Street	Graham Motor Cars	Shambhala Center of Seattle
1525 11 th Avenue	Bocker Building	REI/Value Village
1400 12 th Avenue	Bekins Moving and Storage	Trace Lofts
1201-1205 E. Pike Street	Standard Brands	1205 E. Pike Building
1519-1521 Broadway	Eldridge Tire Company	Broadway Café
1120-1124 E. Pike Street	Packard Seattle	Utrecht Art Supplies
953 E. Union Street	Otto's Radiator Service	The Finer Details
301-309 E. Pine Street	Melrose Building	Melrose Building
311-321 E. Pine Street	Timken Roller Bearing	Le Frock
721-725 E. Pine Street	Flick and Rash	Bill's Off Broadway

THIS VERSION IS NOT ADOPTED



Address	Historic Name	Common Name
1600 Broadway	Boone and Company Pontiac	AEI Music
1511 Boylston Avenue	Glencoe Apartments	Glencoe Apartments

Address	Historic Name	Common Name
1633 Melrose Avenue	Sherwood Apartments	Sherwood Apartments
1631 Belmont Avenue	Conrad Apartments	Conrad Apartments
401 E. Pine Street	Carr Brothers Auto Repair	General Petroleum Museum
1520 Melrose Avenue	Melrose Apartments	Melrose Apartments
1351 Olive Way	Unknown	Fillipi's Old Books and Records
1611 Boylston Avenue	Universal Repair Shop	Universal Repair Shop
1001 E. Pike Street	Unknown	Arensberg/La Puerta
1134 Broadway	Unknown	Vacant
1400 Broadway	Johnson & Hamilton Mortuary	Gilda's Club of Seattle
1426 Broadway	Unknown	Rutherford's Auto Rebuild
1158 Broadway	Unknown	Complete Automotive
1414 Broadway	Western Auto Wrecking	Aker's
1612 Broadway	Unknown	AEI Music
400 E. Pine Street	Hirsch Cycle Co.	Lighting Design Lab and 4 others
501 E. Pine Street	Unknown	Bell Occhio 7 and 3 others
610 E. Pine Street	Unknown	Capitol Loans and 4 others
619 E. Pine Street	Paige Building	R Place
801-805 E. Pine Street	Masonic Temple	Egyptian Theater and SCCC
911-919 E. Pine Street	Odd Fellows Temple	Odd Fellows Temple
909 E. Pine Street	Unknown	In 2 Services
1101 E. Pine Street	S-E Co.	2 nd Base and 1 other
1315-1323 E. Pine Street	Chester Apartments	Capital Grocery and 2 others
1100-1106 E. Union Street	Unknown	Union Art Co-op
1015-1021 E. Pike Street	Lorraine Court Apartments	Wildrose and 2 others
300 E. Pike Street	Gallagher's Fine Cars	Six Arms
1415-1423 10 th Avenue	Unknown	Crescent Down works and 4 others
1101-1103 E. Pike Street	Liebeck Garage	Aria and 7 others
1011-1013 E. Pike Street	Unknown	Chrissa's Window Bar and 1 other
1319 E. Madison Street	Talbot Building	Callahan's Auto Rebuild

¹ Source of Table A for 23.73.010: The Department of Neighborhoods November 2002 Historic Resources Survey, structures categorized as "Yes - Inventory" or "Yes - Hold".

* * *

F. Height exception for lots that include a character structure. In zones with a mapped height limit of 65 feet, or with a 40 foot mapped height limit with provisions allowing for

THIS VERSION IS NOT ADOPTED



1 additional height up to 65 feet pursuant to subsection 23.47A.012.A, the Director may permit the
2 height of a structure to exceed the height limit of the zone by 10 feet, subject to the following:

3 1. The lot includes a character structure, or significant portion of a character
4 structure ~~((and meets the provisions of subsection 23.73.010.C));~~

5 2. For a project that incorporates a character structure, the following conditions
6 shall be met:

7 a. All street facing facades of the character structure are retained;

8 b. All portions of the new structure above the height of the street facing
9 facades of the character structure are set back a minimum of 15 feet from all street property lines
10 that abut the character structure; and

11 c. The original floor to ceiling height of the ground story is maintained.

12 ~~((2))~~3. The additional floor area above the height of 65 feet is occupied solely by
13 residential use; and

14 ~~((3))~~. The project will not result in the demolition of a designated landmark or of
15 a character structure that is identified on Table A for 23.73.010, except as allowed to include a
16 portion of a character structure in the new development pursuant to subsection 23.73.010.C.

17
18 * * *

1 Section 6. This ordinance shall take effect and be in force thirty (30) days from and after
2 its approval by the Mayor, but if not approved and returned by the Mayor within ten (10) days
3 after presentation, it shall take effect as provided by Municipal Code Section 1.04.020.

4 Passed by the City Council the ____ day of _____, 2010, and signed by me in open
5 session in authentication of its passage this ____ day of _____, 2010.

6
7
8 _____
President _____ of the City Council

9 Approved by me this ____ day of _____, 2010.

10
11 _____
Michael McGinn, Mayor

12 Filed by me this ____ day of _____, 2010.


13
14
15 _____
City Clerk

16
17 (Seal)

18
19
20
21
22 Attachment 1: Pike/Pine Urban Center Village Design Guidelines, 2010
23
24
25
26
27
28



Attachment I: Pike/Pine Design Guidelines Ordinance

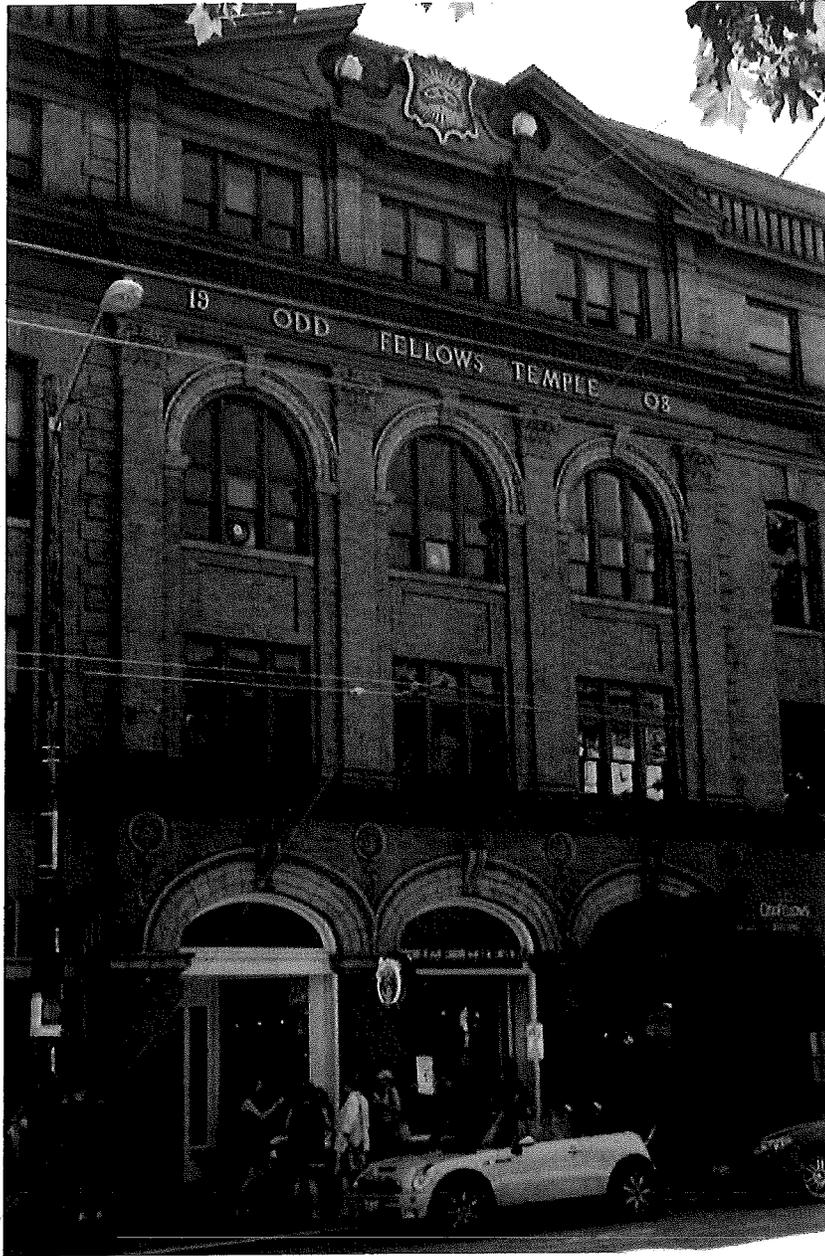

THIS VERSION IS NOT ADOPTED

Pike/Pine Urban Center Village Design Guidelines

August 9, 2010

Projects requiring Design Review must comply with the neighborhood design guidelines in this handbook as well as the Citywide Design Guidelines.

Note: The guidelines are numbered to correspond to the Citywide Design Guidelines (A-1, A-2, etc). A gap in the numerical sequence means there are no neighborhood design guidelines for that particular Citywide Guideline.

A. SITE PLANNING

A-1 Responding to Site Characteristics

Characteristics and opportunities to consider in Pike/Pine include both views and other neighborhood features including:

- A change in street grid alignment causing unique, irregular-shaped lots, including Union and Madison and 10th and Broadway Court
- "Bow tie" intersections at 13th/14th between Pike/Pine/Madison

A-6 Transition Between Residence and Street

Residential entry ways that feature heavy or contrasting trim, distinctive materials and a link to the surrounding streetscape are encouraged.



Figure 1: Transition between residence and street. Arched, recessed entry.



Figure 2: Contemporary treatment of transition between residence and street.

A-7 Residential Open Space

Locating a significant amount of open space on rooftops is discouraged. Open space at street level that is compatible with established development patterns and does not detract from desired, active street frontages is encouraged. While not characteristic of the historic warehouse, commercial, or apartment development in the area, usable balconies may be appropriate on streets where a more residential character is intended, to provide both open space and visual relief on building facades. In other areas, if balconies are provided, it is preferable that they not be located on street-facing facades, but rather on facades facing the side or rear of the lot, or internal courtyards.

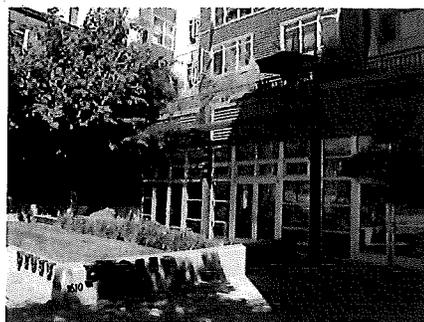


Figure 3: The courtyard of Press Condominiums provides a residential open space amenity on Belmont Avenue E.

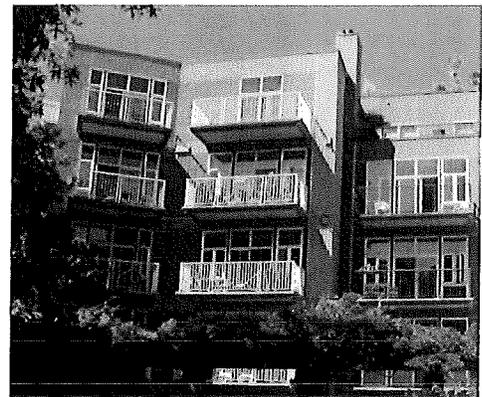


Figure 4: Usable balconies provide visual relief in addition to private open space.



Site Planning

responding to site characteristics

transition between residence and street

residential open space

THIS VERSION IS NOT ADOPTED





Site Planning

location of parking on commercial street fronts

corner lots

A-9 Location of Parking on Commercial Street Fronts

Garage entry ways facing the street should be compatible with the pedestrian entry to avoid a blank façade. Steel mesh is a preferred alternative to solid doors.

A-10 Corner Lots

Buildings on corner lots should reinforce the street corner. To help celebrate the corner, pedestrian entrances and other design features that lend to Pike/Pine's character may be incorporated. These features include architectural detailing, cornice work or frieze designs.

The following corner sites are identified as Pike/Pine gateways (see Map 3, page 4).


- Pike/Boren: southeast corner
- Melrose/Pine: northeast corner
- 12th/Pike intersection
- 12th/Pine intersection
- Madison: between 11th/12th
- Madison entries onto Pike and Pine

Two examples of projects that incorporate architectural materials and detailing that celebrates the corner are shown below:

Figure 5: Recent development



Figure 6: Neighborhood icon building

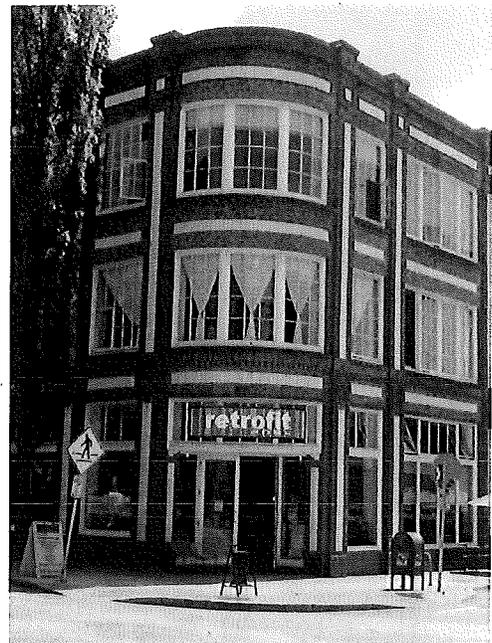

THIS VERSION IS NOT ADOPTED





Pike/Pine Urban Village

Gateways

Legend

- Gateway
- Pike/Pine Urban Village Boundary
- Parcel
- 2000 Boundary
- Park




1" = 125 - 250 Feet

No warranties of any sort, including accuracy, fitness, or merchantability accompany this product.

Copyright © 2000 City of Seattle Prepared by OCLU-GIS

**Map 2:
Gateways**

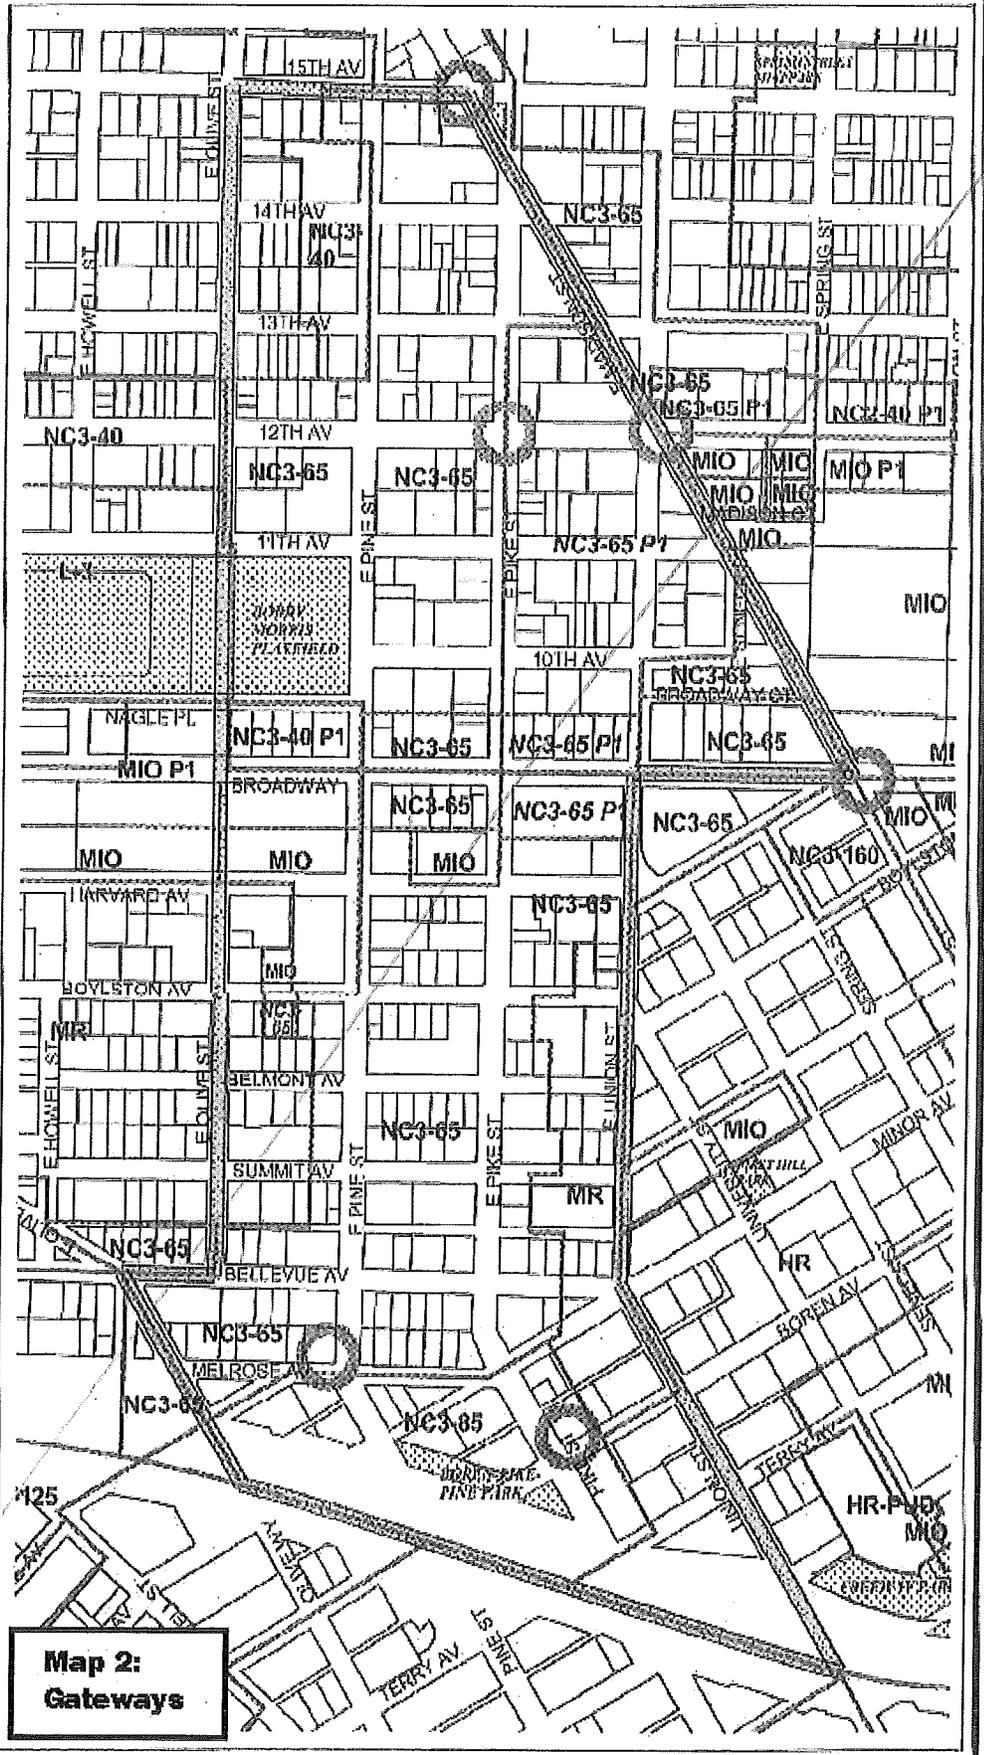

THIS VERSION IS NOT ADOPTED



B. HEIGHT, BULK AND SCALE

- B-1 Height, Bulk, and Scale Compatibility (citywide design guideline)
- B-2 Pike/Pine Neighborhood Scale and Proportion

New buildings should, in general, appear similar in height, mass, and scale to other buildings to maintain the area's visual integrity and unique character. Although current zoning permits structures to exceed the prevailing height and width of existing buildings in the area, structures that introduce increased heights, width and scale should be designed so their perceived scale is compatible with the existing neighborhood character. The following guidelines address scale and proportion for new structures.

B

Height, Bulk and
Scale

a. Design the structure to be compatible in scale and form with surrounding structures.

One, two, and three-story structures make up the primary architectural fabric of the neighborhood. Due to the historic platting pattern, existing structures seldom exceed 50 to 120 feet in width or 100 to 120 feet in depth. Structures of this size and proportion have been ideal for the small, locally owned retail, entertainment, and restaurant spaces that have flourished in this neighborhood. The actual and perceived width of new structures should appear similar to these existing structures to maintain a sense of visual continuity.

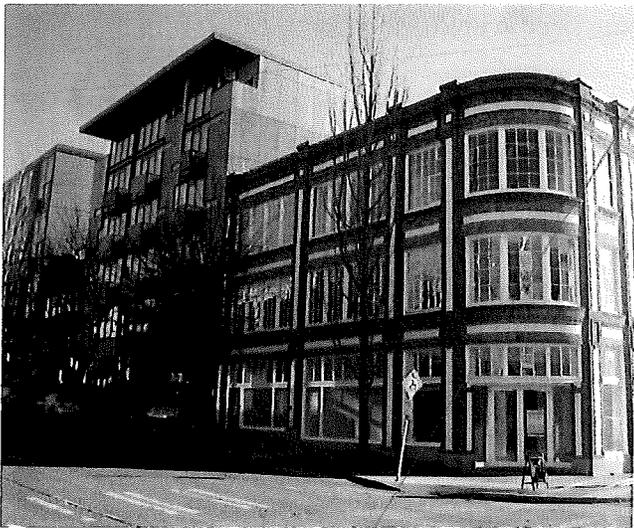


Figure 7: While taller than its neighbor, because of its fenestration, width and depth, the new structure that is consistent with the rhythm of other development on the block and is compatible in scale with its neighbors.

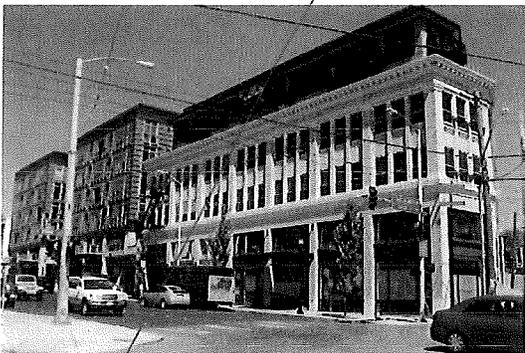


Figure 8: Upper story setbacks maintain street level proportions.

- Respect the rhythm established by traditional facade widths.

Most structure widths are related to the lot width. Typically, structures are built on one lot with a width of 50 or 60 feet; or on two combined lots with a width of 100 or 120 feet. If a proposed development is on a lot that is larger than is typical, it may be necessary to modify the rhythm of the building to maintain the existing scale at the street. Even in older buildings that may be massive, the mass is typically broken up by a rhythm of bays, humanizing the scale of the structure.

- Relate the height of structures to neighboring structures as viewed from the sidewalk.

If a proposed structure is taller than surrounding structures, it may be necessary to modify the structure height or depth on upper floors to maintain the existing scale at the street, especially for larger developments.

- Consider full or partial setbacks of upper stories to maintain street-level proportions.

Given the greater width and height possible for new structures, a more compatible massing may be achieved if portions of the upper floors set back from the street, with other portions extend-

THIS VERSION IS NOT ADOPTED


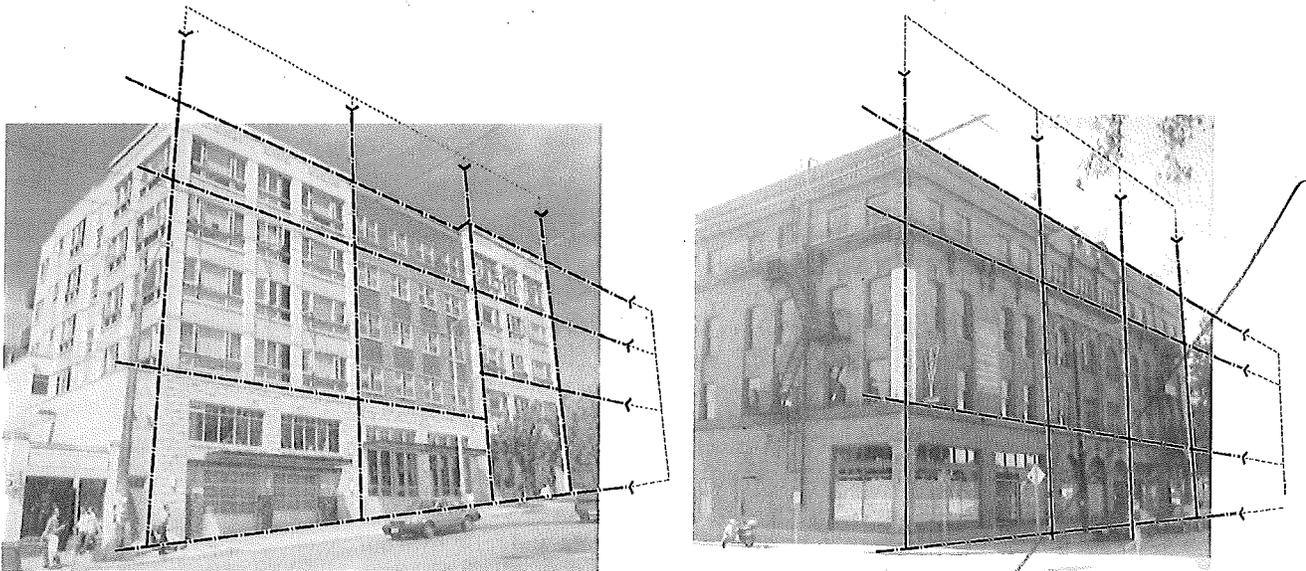


Figure 9: The rhythm established by the neighborhood's original platting and early development provides the basis for determining an appropriate scale relationship between new and old. These illustrations show how the vertical and horizontal treatment of the facades in both an older and more recent building express the prevailing width and height patterns in larger structures.

b. Relate the scale and proportions of architectural features and elements to existing structures on the block face to maintain block face rhythm and continuity.

- Align architectural features with patterns established by the vernacular architecture of neighborhood structures to create visual continuity.
- Use building components that are similar in size and shape to those found in structures along the street from the auto row period.
- Keep the proportions of window and door openings similar to those of existing character structures on the block or in the neighborhood.
- Use windows compatible in proportion, size, and orientation to those found character structures in the surrounding area.



Height, Bulk and Scale

c. Address conditions of wide or long structures.

- For project sites that are wider than usual, articulate the facade to respect traditional façade widths. For example, a facade may be broken into separate forms that match the widths of surrounding structures. This articulation should be substantive, and not merely a surface treatment.
- Employ variations in floor level façades, roof styles, architectural details, and finishes to break up the appearance of large structures.
- Incorporate design features to create visual variety and to avoid a large-scale, bulky or monolithic appearance.
- Consider a street-facing courtyard to minimize the bulk of structures on streets intended to have a residential character.
- Consider stepping back upper stories of structures on larger sites to allow light filter through multiple levels and to create architectural variety.

d. For structures that exceed the prevailing height, reduce the appearance of bulk on upper stories to maintain the established block face rhythm.

Consider the character of the existing block face when determining the appearance of the upper story elements. Whether the upper and lower floors of a structure look different or the same may depend upon the complexity of the existing structures on the block.

- Use the prevailing structure width to create an upper story massing rhythm.
- Break the structure into smaller masses that correspond to its internal function and organization.
- Use changes in roof heights to reduce the appearance of bulk.
- For new structures that are significantly taller than adjacent buildings, especially on larger lots, consider upper floor setbacks of at least 15 feet from the front facade to reduce the perceived height. However, slender forms such as towers and dormers that extend toward the front facade may add visual variety and interest to the setback area.

THIS VERSION IS NOT ADOPTED





Figure 10: Through the use of setbacks, courtyards or other interruptions in the street-facing facade, wider structures can relate better to established scale conditions.

e. Design the first floor facade to encourage a small-scale, pedestrian-oriented character

- Visually separate the ground floor spaces to create the appearance of several smaller spaces 25 feet to 60 feet wide,
- Repeat common elements found in neighborhood commercial buildings, such as clearly defined primary entrances and large display windows.
- Provide generous floor to ceiling heights on the ground floor with a high degree of transparency.
- Consider variations in the street-level facade, such as shallow recesses at entries or arcades, to add variety.

B

Height, Bulk and Scale

B-3. Integration of Character Structures in New Development (Supplemental guidance especially for properties located within the Pike / Pine Conservation Overlay District.)

Within the Pike/Pine Conservation Overlay District, a project can gain height and floor area by retaining a character structure (defined as a structure that is at least 75 years old) on the lot as part of a new development. The Code requires all portions of the new structure above the character structure to set back a minimum of 15 feet from all street facing facades of the character structure, unless the applicant demonstrates that a departure from this standard will result in a better relationship between the new and existing portions of the project. Section B.II provides design guidance for achieving a desirable relationship between the character structure and new portions of the project. The goal is to design a project that complements the character structure and other structures on the block, even while displaying an individual design. These guidelines are to be used in conjunction with Section B.VI, which addresses the treatment of character structures.

THIS VERSION IS NOT ADOPTED

a. Develop a design Concept

Consider different approaches for expressing the relationship between the character structure and new portions of the project. To avoid a superficial design treatment, the new project should not mimic the style of the character structure inappropriately. Approaches to consider include:

- **Contrast:** Design the new addition in a manner that provides differentiation in materials, color, ornamentation and detailing so that the new work does not imitate the character structure, but still responds to the essential elements of scale and character. For example, if the character structure provides a solid, sturdy base, the additional upper floors could have a high degree of transparency and glazing to give them an appearance of lightness.
- **Transition:** Provide a transition in form and character between the new and old portions of the project. The project's composition could present the character structure as one element, with part of the new structure accommodating a design transition between the character structure and portions of the new structure that have a distinct identity.
- **Background:** Design new portions of the project as a backdrop to the character structure to minimize the impact on the character structure and emphasize its role as an established element of the streetscape. Also, it is not uncommon for older buildings to have been constructed in a manner that would have anticipated future expansions. A successful blending of the original and new portions of the project may be achieved through a skillful use of architectural elements and materials inspired by the original design and function of the character structure.

In addition to choosing a design concept as outlined in subsection a, new projects that seek a departure from the 15 foot setback requirement must comply with the guidelines in subsection B1 and the following guidelines b through f:



Height, Bulk and Scale

b. Do not overpower the character structure.

Design the size, scale, massing, and proportions of the new structure to be compatible with the character structure.

- Use siting, setbacks, structure orientation, massing, and rhythm, both at the street level and on floors above, to maintain a strong presence of the character structure in the streetscape.
- Respect the scale of the existing character structure and avoid new construction that appears to be an oversized expansion of the original design.



Figure 11: In this successful example, structures to the left, right, and above the center structure are additions.



Figure 12: From this vantage point on the sidewalk, the upper story addition is not visible from the street, due to its setback.

THIS VERSION IS NOT ADOPTED



c. Express the relationship between the character structure and new portions of the project.

- Identify distinctive features of the character structure that can be emphasized or expressed in the new structure, such as: building orientation, corner treatments, massing characteristics, stacking of floors, special treatment of entries, fenestration patterns, changes in the structural spacing or rhythm of bays, or other special elements.
- Design the new structure to draw attention to significant features of the character structure to maintain or increase their importance in the building's overall composition.
- Emphasize important elements of the character structure and design the new structure so that it does not compete with those elements, but rather strengthens or provides a backdrop to them.

d. Emphasize the streetscape.

The street level is the portion of the structure that pedestrians experience most directly and is most critical to maintaining a sense of continuity between the character structure and the new project.

- Maintain the original aspects of the character structure's street level design and function as much as possible.
- Consider how elements of the character structure's original design can be adapted to the functions of the new structure, such as major entries to the structure, public areas and internal circulation, service access, and ground floor uses that are oriented primarily to the street.

B

Height, Bulk and Scale

e. Align features of the character structure with features of new portions of the project.

The alignment of architectural features and elements in the new and existing portions of the project creates visual continuity and establishes a coherent visual context.

- Design facades to reinforce the patterns of the character structure and express the connection between the new and old portions of the project.

f. Consider design treatments that anchor the new structure to the streetscape.

As part of a new project, a character structure can help integrate new development with the existing neighborhood fabric. However, it may also be desirable for the new structure to emphasize its own identity in the streetscape by directly connecting to the street level, or through other measures that strengthen the new structure's presence on the street.

- When adjacent to the character structure, it may be possible for elements of the new structure to successfully surround or "wrap" the character structure to anchor the new structure to the character structure and the streetscape.
- When new additions are above the character structure, it may be desirable for portions of the new structure to extend to the street to better integrate it with the streetscape and avoid the appearance of "floating" as an unrelated element above the character structure.



Figure 13: While the new structure is built above an existing character structure, the portion of the new structure that extends to the street helps to anchor the project to the streetscape.

THIS VERSION IS NOT ADOPTED

B-4. Small Lot Development (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

The Pike/Pine Conservation Overlay District encourages development on small lots of 8,000 square feet or less by exempting the residential floor area in the project from the FAR limit. While the scale of development on small lots is compatible with the existing developed context, such projects may still present design challenges that require attention to ensure the best fit between the new and the old at any given site. New structures on small lots should maintain the character of the Pike/Pine neighborhood, and not use the small size of the lot as a reason to compromise maintaining compatibility with the character of the area.

a. Consider the project's impact on the street environment

- Maintain solid massing of the street wall.
- Site driveways and design vehicular garage entrances so that they do not dominate the street front.
- Orient the structure's street level uses, building entrances, and service areas so that street-level priorities for commercial and pedestrian activity are not compromised.

b. In order to maintain a continuous street wall, front setbacks are discouraged

"T" or "L" shaped structures that maintain a continuous street wall while allowing setbacks from shared lot lines on the interior of the lot are preferred over setbacks of upper floors fronting the street.

Ground level front setbacks may be appropriate in limited circumstances to enhance the project's relationship to the pedestrian environment by providing such features as wider sidewalks, space for residential entries, or other pedestrian amenities.

In some circumstances, an upper level front setback may be appropriate to better relate a taller new structure to the prevailing height of adjacent character structures.



Height, Bulk and Scale

c. Provide appropriate rear and side setbacks

Side and rear setbacks are most important on the upper floors of portions of the structure that do not face the street. Maintaining a continuous street wall to preserve the streetscape character at ground level generally takes precedence.

- Provide setbacks from side and rear lot lines to maximize access to light, air, and usable space between structures and to minimize exposed blank walls.
- Avoid blank walls on the sides of structures that abut neighboring lots, while recognizing the potential for abutting development in the future. In general, blank walls are discouraged.
- Use the rear of the lot for parking or other open areas. Rear setbacks may be used to create light courts, seating areas, or courtyards.



Figure 14: Successful small lot development on Pike Street.

THIS VERSION IS NOT ADOPTED



B-5. Through-Block Development

While most blocks in the Pike/Pine neighborhood lack alleys, development seldom extends across a full block from street to street. The predominant development pattern is comprised of individual structures that front on the street and extend no deeper than mid-block. New developments on through block lots should be carefully designed for compatibility with this established fabric.

a. Avoid monolithic development on through lots.

- Observe in new through-block projects the original platting and development pattern, which is generally characterized by structures limited to a half-block in depth, with widths of 50 to 60 foot increments along the street.

b. On blocks bounded by designated principal pedestrian streets, take advantage of opportunities to include through-block connections.

Through block connections can extend a fine-grained pedestrian environment into the interior of the block, offer a transition between public and private spaces, and unite both sides of the block face. As more intensive development occurs over time, through block connections can contribute to a more complex, intimate pedestrian environment.

- Make through-block connections clearly identifiable, accessible, and attractive.
- Create focal points to draw pedestrians into and along through-block pathways.
- Encourage abutting uses that will promote public access into through-block connections during appropriate hours to activate space.
- Ensure a porous façade on through-block pedestrian connections by providing frequent openings and breaks to provide visual interest, and to allow free movement of pedestrian traffic through the block face.
- Consider opportunities for open space and other amenities in block interiors, such as gardens, courtyards, fountains, lighting and seating to unite different uses in the block.

B

Height, Bulk and
Scale

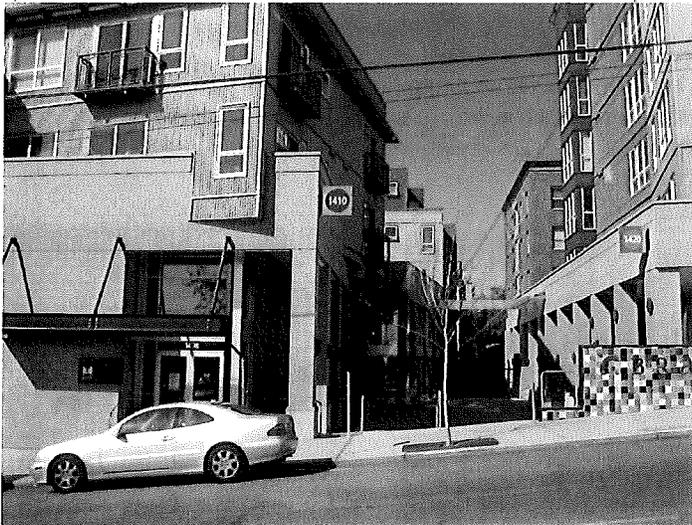


Figure 15: In appropriate circumstances, a through-block corridor can contribute to a more compatible sale of development while creating opportunities to expand the pedestrian network.

c. Capitalize on opportunities to provide utility functions in through-block development

Several of the through-block sites in the Pike/Pine neighborhood are in the vicinity of 10th, 11th, and 12th Avenues. Grade changes between these streets present opportunities for through-block development that may be designed to include drop-off, parking, and service and delivery areas within the development in a manner that efficiently accommodates these functions and minimizes conflicts with pedestrian activity along block perimeters.

THIS VERSION IS NOT ADOPTED

B-6. DEVELOPMENT IN AREAS LACKING A WELL-DEFINED CHARACTER (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

Some areas where the Pike/Pine Conservation Overlay District was expanded during 2009 lack an apparent overriding visual character, or the character may be mixed or changing. When no clear pattern is evident, new development should help define and unify the existing visual context and contribute positively to the Pike/Pine neighborhood character. Designs should draw on the best features of surrounding buildings, or of the surrounding neighborhood, to create a more complex, intimate pedestrian environment.

a. Design structures to help define, unify and contribute positively to the existing visual context.

New structures should enhance pedestrian and visual connectivity along streets oriented to the north and south, including connections to the 12th Avenue Urban Center Village across Madison Street.

- Capitalize on excess and undefined right-of-way areas, including overly wide street surfaces on side streets, to enhance pedestrian circulation and gathering, and for landscaping and other streetscape improvements.
- Encourage streetscape treatments that retain the informal character of side streets, such as shared pedestrian and vehicle loading areas, lower curb heights and varied curb lines, and textured paving materials.
- Include high ceilings in the ground floor spaces of new structures that are consistent with older character structures in the neighborhood. Floor to ceiling heights of at least 15 feet are encouraged.

B-7. Conservation of Character Structures (Supplemental guidance especially for properties located in the Pike/Pine Conservation Overlay District.)

The Pike/Pine Conservation Overlay District encourages preservation and enhancement of the unique character of the Pike Pine neighborhood. A high priority for achieving this objective is the conservation and reuse of existing character structures. The Overlay District includes both exceptions that apply when a character structure is retained and incentives for conserving and reusing these structures. This Section VI provides guidance for appropriate conservation of character structures.



Height, Bulk and Scale

a. Maintain the architectural integrity of the character structure

- Avoid all but minor changes to the primary elevation(s) of the character structure
- Make a visual distinction between old and new: new construction should be distinguishable from the character portion.
- Keep the addition compatible with the character structure in form, scale, massing, and proportion.
- Do not obscure significant features of the character structure.



Figure 16: Renovated character structures that have retained character-defining elements.

THIS VERSION IS NOT ADOPTED



b. Maintain Character-Defining Elements

- Identify the form and detailing of those architectural materials and features important to defining the structure's character and that should be retained. Character-defining elements may include:
 - Exterior materials, such as masonry (especially brick), wood, and metal;
 - Exterior features and details such as: entrances, fully-glazed storefront windows and expansive glazing, parapets, cornices, roofs, windows, ornamentation (such as terra cotta cladding), signage (including emblems and embossed building names) and color;
 - Structural characteristics, including expressions of interior space on the structure façade, and structural elements defining organization, architectural composition, rhythm, and massing; and
 - Both horizontal and vertical lines that help define the rhythm of the character structure, often by marking a repeating bay.
- Retain, repair, rehabilitate or replace character-defining elements of the character structure, using generally accepted methods.
- Avoid adding materials or features that were not historically part of the character structure.

c. Recognize the priority for maintaining the original floor-to-ceiling heights in character structures, especially for the ground floor and for features visible from the exterior.

- Ensure that double-height windows on street-facing facades are visible and apparent from the street.
- Avoid inserting a "new" floor within a double-height ground level unless:
 - 1) The full height of the double height window is not obstructed for a sufficient depth from the structure's façade (generally, a depth of at least 30 feet) to maintain a sense of the original space as viewed from the street, and the visual expression of the structure in the double height storefront's facade is not substantially altered by including the new floor; or
 - 2) Characteristics of the original architecture or structure lend themselves to this modification. For example, where a mezzanine existed in the original structure, or where slope changes or changes in window placement in the character structure would minimize the perception of the new floor.

B

Height, Bulk and Scale



Figure 17: High floor-to-ceiling heights as character defining element.

THIS VERSION IS NOT ADOPTED

d. Sensitive locate additions so they do not dominate the appearance of the character structure.

The Pike/Pine Conservation District Overlay encourages additions that enable reuse and preservation of the character structure. The compatibility of an addition is dependent on the design of the original building, its site and immediate context.

- Consider the size and location of the addition in order to minimize its visibility from the street and its impact on light to adjacent structures.
- Place the major mass of the addition on an inconspicuous side or rear elevation so the addition does not radically change the form and character of the character structure.
- Consider setting additional stories well back from the roof edge to ensure that the character structure's proportions and profile are not radically changed.
- For additions that abut a character structure, retain the original proportions, scale, and character of the main facade. Consider a slight setback from the principal façade.

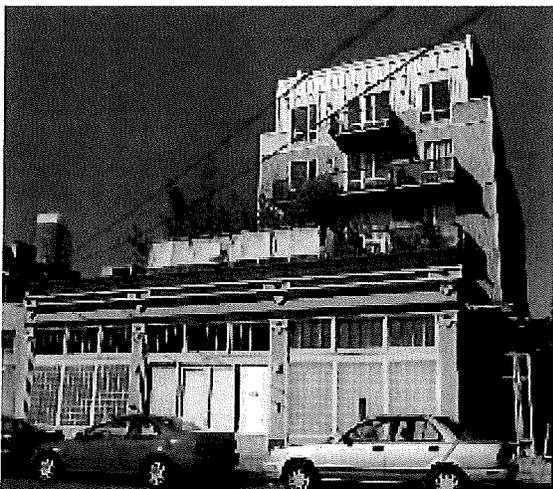


Figure 18: This addition is placed to the rear of the character structure and set well back from the street front, retaining the original proportions, scale and character of the main facade.



Height, Bulk and
Scale

THIS VERSION IS NOT ADOPTED

C. ARCHITECTURAL ELEMENTS AND MATERIALS



Architectural Elements and Materials

architectural context



Figure 18:
Context—pilasters, arched terra cotta cladding, parapet

C-1 Architectural Context

The Pike/Pine “vernacular” architecture is characterized by the historic auto row and warehouse industrial buildings featuring high ground-floor ceilings, articulated ground-floor commercial space, display windows, detailed cornice and frieze work, and trim detailing.



Figure 20:
Context—light industrial signage and building design; tall windows



Figure 21:
New construction—large windows, balconies provide visual modulation.

THIS VERSION IS NOT ADOPTED

Figure 22: Signature Pike/Pine architectural styles

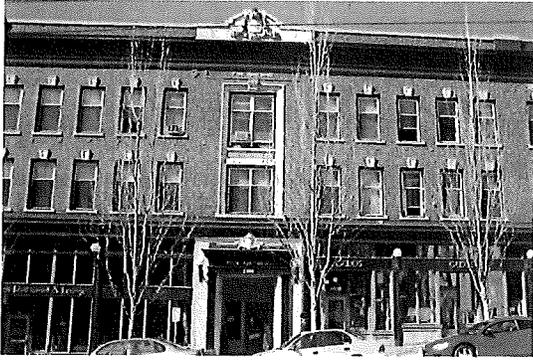


Figure 22a: Villa Apartments

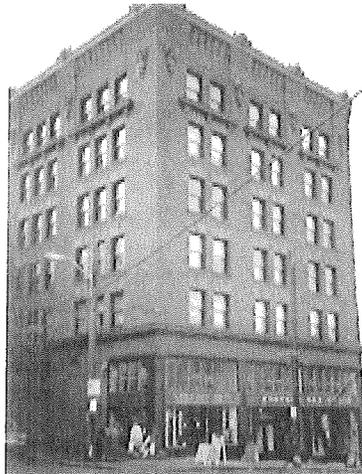


Figure 22b: Wintonia

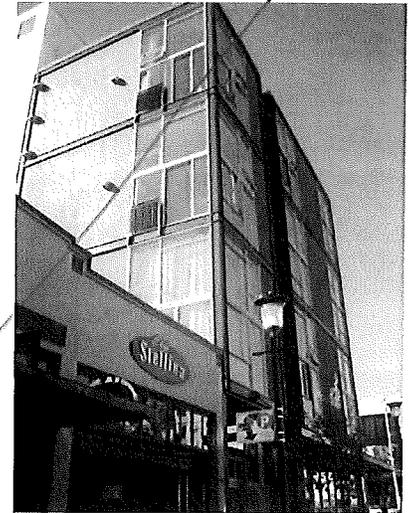


Figure 22c: Agnes Lofts

New buildings should echo the scale and modulation of neighborhood buildings in order to preserve both the pedestrian orientation and consistency with the architecture of nearby buildings. Architectural styles and materials that complement the light-industrial history of the neighborhood are encouraged.

Examples of preferred elements include:

- Similar building articulation at the ground level;
- Similar building scale, massing and proportions; and
- Similar building details and fenestration patterns.

Taking architectural cues from the following developments is encouraged:

- Villa Apartments (NE Pike/Boren);
- Wintonia (SW Pike/Minor);
- NW Boylston/Pine
- Pike Lofts (SW Pike/BelleVue);
- Schuyler (SW Pike/Boylston);
- 615 E Pike Condominiums (SW Pike/Boylston);
- Monique Lofts (NW Pike/11th);
- 1101 E Pike Street (SE Pike/11th);
- Agnes Lofts (SW Pike/13th);
- Elysian Brewery (SE Pike/13th);
- Oddfellows (SE Pine/10th);
- Trace Lofts (12th/between Pike and Madison)
- 1100 Union



Figure 22d: 1100 Union

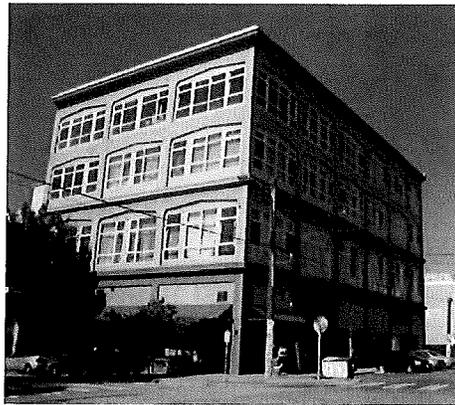


Figure 22e: Monique Lofts

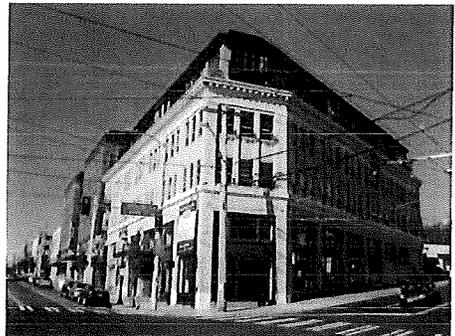


Figure 22f: Trace Lofts



Architectural Elements and Materials

human scale

THIS VERSION IS NOT ADOPTED



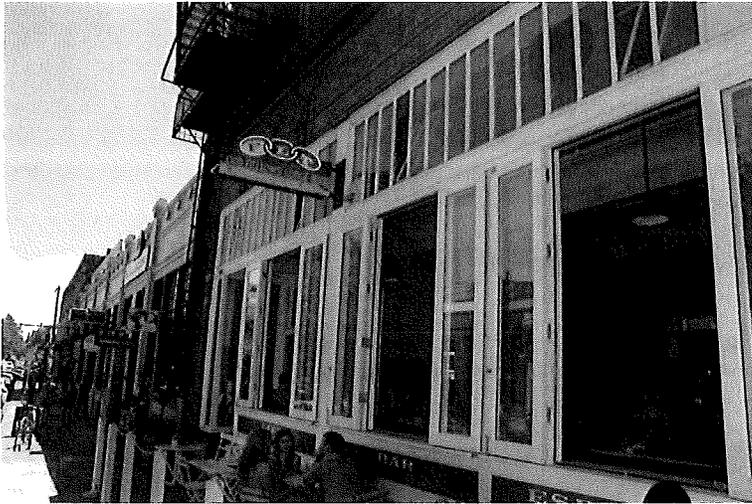


Figure 23: Sidewalks as open space



Architectural Elements and Materials

architectural context



Figure 24: Retail entryway—transparent windows, floor-to-ceiling, unique signage



Figure 25: Transparent windows, retail modules and consistent entrances lend to human-scaled streetscape.

C-3 Human Scale

In order to achieve good human scale, the existing neighborhood context encourages building entrances in proportion with neighboring store-front developments.

In addition to the Citywide Design Guidelines, developments should successfully contribute to the vitality of the street level and pedestrian scale relationships to the right-of-way. Thus, the design of the ground floor of new developments should include:

- Pedestrian-oriented architectural elements
- A rhythm of building modulation comparable or complimentary to adjacent buildings
- Transparent, rather than reflective, windows facing the street

This is important throughout the neighborhood. It is preferred that ground floor development echoes the patterns established by adjacent buildings in this area, including high bays and glazing along the ground floor. To this regard, cues can be taken from the Oddfellows and Elliott Bay Bookstore buildings on 10th Avenue E. between Pike and Pine and from the buildings on the south side of Pike Street between Boylston and Harvard Avenues.

THIS VERSION IS NOT ADOPTED



C-4 Exterior Finish Materials

New development should complement the neighborhood's light-industrial vernacular through type and arrangement of exterior building materials. Preferred materials and approaches include:

- Brick, masonry, textured or patterned concrete, true stucco (Dryvit is discouraged), with wood and metal as secondary or accent materials.
- Other high quality materials that work well with the historic materials and style of neighboring buildings
- Limited number of exterior finish materials per building
- High quality glazing and trim as a vital component of exterior finish



Figure 26: Ornamental detailing, decorative trim, parapet, traditional materials, transparency.

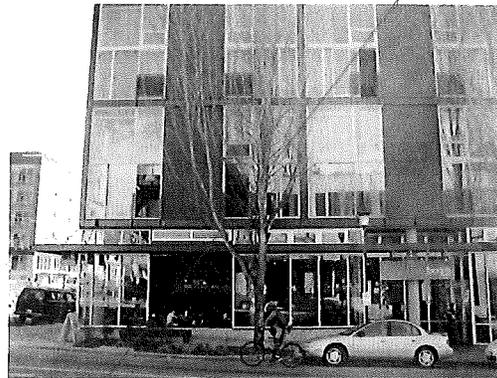


Figure 27: Use of modern materials



Architectural Elements and Materials

exterior finish materials



Figure 28: Window trim detailing

THIS VERSION IS NOT ADOPTED

D. PEDESTRIAN ENVIRONMENT

D-3 Retaining Walls

Where retaining walls are unavoidable near a public sidewalk, a textured surface or inlaid material is encouraged.

D-4 Design of Parking Lots Near Sidewalks

Screening of Parking

For secured surface parking lots, the use of cyclone wire or chain-linked fencing should be avoided and instead, the artistic use of mesh fencing, fabricated iron, decorative hard-scape and landscape materials including perimeter trees are encouraged.

D-5 Visual Impact of Parking Structures

Incorporate vertical landscaping (trellises) or artwork as screens where feasible.

Parking structures should provide commercial or other pedestrian-oriented uses at street level.

D-7 Personal Safety and Security

Lighting installed for pedestrians should be hooded or directed to pathways leading towards buildings.



Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security

THIS VERSION IS NOT ADOPTED

D-8 Signs

a. Promote the pedestrian environment

- Signs should be oriented toward and promote the pedestrian environment
- Signs that are placed at the height and are of a scale to attract drivers, instead of pedestrians, are not consistent with the neighborhood's special character.
- Window signs should not cover a large portion of the window so as not to be out of scale with the window, storefront or façade.

b. Reflect the special neighborhood character

- Signs should complement and not detract from the special character of the Pike/Pine neighborhood. Key elements of this character include: signs associated with a concentration of small, local businesses, particularly businesses related to the arts; activities oriented to the pedestrian, including uses that extend activity well into the evening; a cohesive collection of early twentieth century commercial buildings with distinctive architectural characteristics; and a predominance of unique and diverse signs, instead of standardized signs, that advertise the availability of goods and services.
- Signs should relate physically and visually to their location and uniquely reflect the character and nature of the business they advertise.



Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security

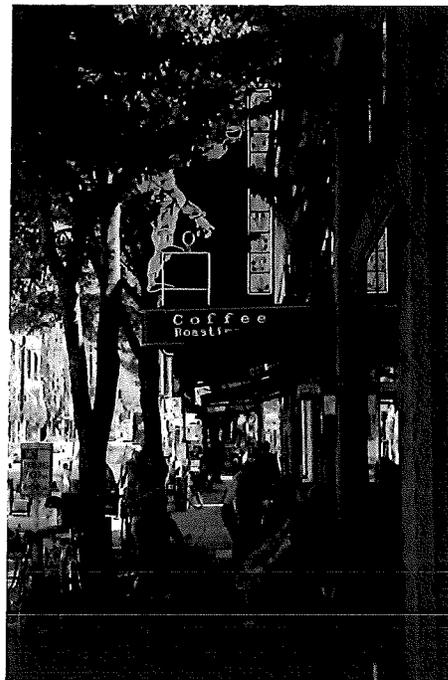
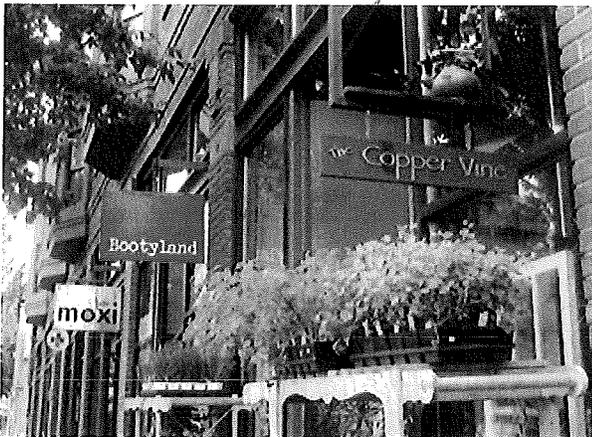


Figure 29: The best examples of signs appropriate for the Pike/Pine neighborhood are those for small, independent retail shops or restaurants. These reveal creativity and individual expression, and along a block, can be part of the rhythm that attracts the pedestrian to walk there.

THIS VERSION IS NOT ADOPTED

- Signs should not hide, damage, or obstruct the architectural elements of the building; and their design and placement should be well integrated with the design and style of the structure, especially when attached to a character structure.

D

Pedestrian Environment

retaining walls

design of parking lots near sidewalks

visual impact of parking structures

personal safety and security



Figure 30: A simple, straightforward sign compatible with the structure's design.

- Signs should be designed as distinctive additions to the streetscape and should not appear mass-produced
- Backlit signs are generally inconsistent with the special character of the neighborhood, particularly when they are a standardized design that creates a generic look.

THIS VERSION IS NOT ADOPTED

E. LANDSCAPING

E-2 Landscaping to Enhance the Building and/or Site

The creation of small gardens and art within the street right-of-way is encouraged in the Pike/Pine neighborhood in order to enhance and energize the pedestrian experience. This is especially desirable for residential and mixed use developments as well as a means to distinguish commercial areas from institutional areas. Providing vertical landscaping, trellises or window boxes for plants is also desirable. Street greening is specifically recommended along the following streets:

- Avenues between Union and Pike Streets, from Minor Avenue on the west to Harvard Avenue on the east;
- Along Bellevue, Summit, Belmont, and Boylston (except from Pike to Pine)
- Union Street from Boren to Broadway
- Avenues between Pike and Olive Streets from 11th Ave. on the east to 14th Ave. on the west including Pine from 14th and 15th and Olive from 11th to 15th (except along 14th Ave. from Pine to Pike)

Permit approval from Seattle Department of Transportation (SDOT) is required in most cases for features placed within the City Right-of-Way and early coordination with SDOT is recommended.



Landscaping

landscaping to enhance the building and/or site



Figure 31: Landscaping that enhances the streetscape at a residential building entrance on Nagle Place.

THIS VERSION IS NOT ADOPTED

STATE OF WASHINGTON – KING COUNTY

--SS.

261083
CITY OF SEATTLE, CLERKS OFFICE

No.

Affidavit of Publication

The undersigned, on oath states that he is an authorized representative of The Daily Journal of Commerce, a daily newspaper, which newspaper is a legal newspaper of general circulation and it is now and has been for more than six months prior to the date of publication hereinafter referred to, published in the English language continuously as a daily newspaper in Seattle, King County, Washington, and it is now and during all of said time was printed in an office maintained at the aforesaid place of publication of this newspaper. The Daily Journal of Commerce was on the 12th day of June, 1941, approved as a legal newspaper by the Superior Court of King County.


The notice in the exact form annexed, was published in regular issues of The Daily Journal of Commerce, which was regularly distributed to its subscribers during the below stated period. The annexed notice, a

CT:ORDINANCE 123392


was published on


09/30/10

The amount of the fee charged for the foregoing publication is the sum of \$ 689.33, which amount has been paid in full.

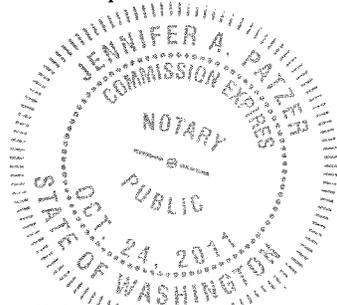

Affidavit of Publication

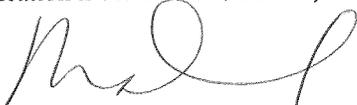

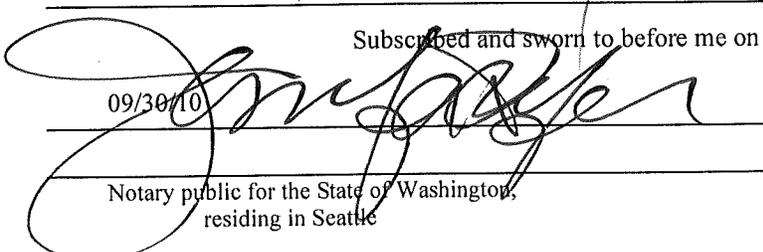Subscribed and sworn to before me on
09/30/10 

Notary public for the State of Washington,
residing in Seattle

City of Seattle

ORDINANCE 123392

AN ORDINANCE relating to land use and zoning; amending Sections 23.41.010, 23.41.014, 23.55.030, and 23.73.010 of the Seattle Municipal Code, adding a new subsection to Section 23.41.12, approving and adopting revised Neighborhood Design Guidelines for the Pike/Pine Urban Center Village, and amending provisions in the Pike/Pine Conservation Overlay District to better maintain the character of the Pike/Pine neighborhood.

WHEREAS, in response to the 1991 Pike/Pine Planning Study sponsored and conducted by a coalition of Pike/Pine neighborhood and civic groups, business and property owners, and residents, the Pike/Pine Overlay District was established to preserve and enhance the area's mixed-use character; and

WHEREAS, in March 1999, the City Council adopted Ordinance 119413 amending the City's Comprehensive Plan to include key goals and policies from the 1998 Pike/Pine Urban Center Village Plan, which reaffirmed the neighborhood's commitment to mixed-use development, while identifying additional priorities including: 1) sustaining the character of Pike/Pine through implementation of urban design recommendations and policy changes and 2) considering a "conservation district" for the neighborhood; and

WHEREAS, in September 2000, the City Council adopted Ordinance 120081 adopting Neighborhood Design Guidelines for the Pike/Pine Urban Center Village; and

WHEREAS, in July 2009, the City Council adopted Ordinance 123020, renaming the overlay district the Pike/Pine Conservation Overlay District, expanding its boundaries, and adding provisions that limit the scale of new projects, encourage new projects to retain existing structures as part of a development site, provide spaces for small businesses at street level, and accommodate facilities serving the arts, to

further the preservation and enhancement of the unique character of the Pike/Pine neighborhood; and

WHEREAS, additional design guidelines for Pike/Pine and greater involvement of the Design Review Board will encourage new buildings and signage that contribute to the character of the Pike/Pine neighborhood and help maintain "character structures" that are incorporated into new developments;

WHEREAS, the Department of Planning and Development is updating the 15 year old citywide design guidelines on which all neighborhood design guidelines are based, and this effort provides an opportunity to reorganize the Pike/Pine Neighborhood Design Guidelines to match the new citywide format, and to update the illustrations in the Pike/Pine Neighborhood Design Guidelines; NOW THEREFORE,

BE IT ORDAINED BY THE CITY OF SEATTLE AS FOLLOWS:

Section 1. Section 23.41.010 of the Seattle Municipal Code, which section was last amended by Ordinance 122994, is amended as follows:

Section 23.41.010 Design Review Guidelines

A. The "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended 2006)" and neighborhood design guidelines approved by the City Council and identified in subsection B of Section 23.41.010, provide the basis for Design Review Board recommendations and City design review decisions, except in Downtown, where the "Guidelines for Downtown Development, 1999" apply. Neighborhood design guidelines are intended to augment and make more specific the "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended 2006)" and the "Guidelines for Downtown Development, 1999." To the extent there are conflicts between neighborhood design guidelines and the "Guidelines for Multifamily and Commercial Buildings, 1998 (Amended 2006)" or "Guidelines for Downtown Development, 1999", the neighborhood design guidelines prevail.

B. The following Neighborhood design guidelines are approved:

1. "University Community Design Guidelines, 2000;"
2. "Pike/Pine Urban Center Village Design Guidelines, ((2000)) 2010;"
3. "Roosevelt Urban Village Design Guidelines, 2000;"
4. "Ballard Municipal Center Master Plan Area Design Guidelines, 2000;"
5. "West Seattle Junction Urban Village Design Guidelines, 2001;"
6. "Green Lake Neighborhood Design Guidelines, 2001;"
7. "Admiral Residential Urban Village Design Guidelines, 2002;"
8. "South Lake Union Neighborhood Design Guidelines, 2005;"
9. "Northgate Urban Center and Overlay District Design Guidelines, 2003;"
10. Belltown Urban Center Village Design Guidelines, 2004;
11. Wallingford Neighborhood Design Guidelines, 2005;
12. Capitol Hill Neighborhood Design Guidelines, 2005;
13. Greenwood/Phinney Neighborhood Design Guidelines, 2005;
14. Othello Neighborhood Design Guidelines, 2005;
15. North Beacon Hill Design Guidelines, 2006;
16. North District/Lake City Guidelines, 2006;
17. Morgan Junction Neighborhood Design Guidelines, 2007;
18. Upper Queen Anne Neighborhood Design Guidelines, 2009; and
19. Uptown Neighborhood Design Guidelines, 2009.

Section 2. A new subsection E of Section 23.41.012, which section was last amended by Ordinance 123206, is added as follows:

23.41.012 Development standard departures

E. Departures for retaining character structures on lots in the Pike/Pine Conservation Overlay District. Departures from the conditions in subsections 23.73.010.C.2 and 23.73.010.F.2 when retaining a character structure as part of a new project may be granted if the following conditions are met:

1. The retained portion of the character structure is sufficient to give the appearance of a free-standing structure; or
2. The newly-constructed portion of the project, through vertical or horizontal modulation or other design treatments, generally provides for better integration of the physical appearance and arrangement of interior spaces between the character structure and the new project than would occur through the strict application of subsection 23.73.010.C.1; or
3. Additional flexibility is necessary to maintain a character structure on a small development lot that is 8,000 square feet or less in size; and
4. The ground story of the character structure can accommodate the elements of the proposed new structure, such as a mezzanine or additional story, while maintaining the original character of the character structure by retaining sufficient portions of the ground floor that are visible from the street at the original floor to ceiling height, through appropriate placement and design of the new structure, or through other design means that are consistent with the Pike/Pine Urban Center Design Guidelines.

Section 3. Subsection B of Section 23.41.014, which section was last amended by Ordinance 123206, is amended as follows:

23.41.014 Design review process

B. Early Design Guidance Public Meeting.

1. Following a preapplication conference, and site visits by Design Review Board members assigned to review a proposed project, an early design guidance public meeting with the Design Review Board shall be held.
2. The purpose of the early design guidance public meeting shall be to identify concerns about the site and the proposed project, review the design guidelines applicable to the site, determine neighborhood priorities among the design guidelines, and explore design concepts and/or options.

3. At the early design guidance public meeting, the project proponents shall present the following information:

- a. An initial site analysis addressing site opportunities and constraints, the use of all adjacent buildings, and the zoning of the site and adjacent properties; and
- b. A drawing of existing site conditions, indicating topography of the site and the location of structures and prominent landscape elements on or abutting the site (including but not limited to all trees ((six (6))) 6 inches or greater in diameter measured ((four and one-half (4½))) 4.5 feet above the ground, with species indicated); and
- c. Photos showing the facades of adjacent development, trees on the site, general streetscape character and territorial or other views from the site, if any; and
- d. A zoning envelope study (which) that includes a perspective drawing; and
- e. A description of the proponent's objectives with regard to site development.

f. In the Pike/Pine Conservation Overlay District established in Section 23.73.004, if a character structure is located on the same lot as a proposed project, the applicant shall:

1) Analyze the features that define the developed context of the structures located on the block front where the project is proposed, and on all block fronts facing the project;

2) Evaluate the relationship of the character structure's key architectural and structural elements to the developed context, and how the new project will respond to this relationship; and

3) Evaluate the character structure's key architectural and structural elements and how the new project will maintain those elements by retaining the character structure or reflecting those elements in the new structure, or both.

4. ((The)) Except as provided in this subsection 23.41.014.B.4, the proponent is encouraged, but not required, to bring one ((1)) or more development concepts or alternatives to indicate possible design options for the site. In the Pike/Pine Conservation Overlay District established in Section 23.73.004, if a character structure is located on the same lot as a proposed project, the applicant shall provide at least one alternative development concept that maintains the character structure's key architectural and structural elements and the integrity of the character structure.

Section 4, Subsection D of Section 23.55.030 of the Seattle Municipal Code, which section was last amended by Ordinance 123020, is amended as follows:

Section 23.55.030 Signs in NC3, C1, C2 and SM zones

D. In the Pike/Pine Conservation Overlay District, internally-illuminated cabinet signs larger than 3 square feet in size and backlit awning signs are prohibited.

Section 5. Subsection C of Section 23.73.010, which section was last amended by Ordinance 123020, is amended as follows:

23.73.010 Development standards

C. Retaining character structures on a lot. A 25 percent increase in the floor size limit above 35 feet in height is permitted for projects that incorporate a character structure on the same lot, either as a whole structure or as a portion of a structure, pursuant to the following provisions.

1. No increase in floor size is permitted under the provisions of this subsection for a project that will result in the demolition of a designated Seattle Landmark or a character structure identified on Table A for 23.73.010.

2. For a project that incorporates portions of a character structure, the following conditions shall be met:

- a. All street-facing facades of the character structure are retained; ((and))
- b. All portions of the new structure above the height of the street facing facades of the character structure are set back a minimum of 15 feet from all street property lines that abut the character structure((:)); and

2

c. The original floor-to-ceiling height of the ground story is maintained.

((3- As an alternative to the provisions of subsection 23.73.010.C.2, the Director may, as a Type I decision, waive or modify the conditions of this subsection, based on the following:

a. The portion of the structure that is retained is sufficient to give the appearance of a free-standing building; or

b. The newly constructed portion of the project, through vertical or horizontal modulation or other design treatments, generally provides for a better integration of the existing structure with the new project, in terms of both physical appearance and the arrangement of interior spaces, than would otherwise occur through the strict application of the standards in subsection 23.73.010.C.1; or

c. Additional flexibility is necessary to maintain a character structure on a small development lot that is 8,000 square feet in size or less;))

((4)3. Any floor area in a new portion of the structure above 35 feet in height that is within the area of the original footprint of the character structure and is separated from the street along all street frontages by the original facades of the character structure is not included in the calculation of the floor area subject to the floor size limit.

((5)4. A project that is granted an increase in floor size under the provisions of this subsection 23.73.010.C shall maintain the character structure, or portions of the character structure, both interior and exterior, in good condition and repair and in a manner that preserves unique features and characteristics for the life of the project. Any increase in floor size permitted pursuant to this Section 23.73.010.C shall not be combined with any increase in floor size permitted pursuant to Section 23.73.010.B.

Table A for 23.73.010

Identified Character Structures 1

Address -- Historic Name -- Common Name

- 1519 12th Avenue -- Overland Pacific Building -- Police Department East Precinct
- 300 E. Pike Street -- Butterworth Mortuary -- Butterworth Mortuary
- 1501 Broadway -- Broadway State Bank -- Tully's
- 1205 E. Pine Street -- McAlpin-Schreiner Company -- Foley Sign Company
- 1021 E. Pine Street -- Colyear Motor Sales Company -- REI/Velo Bike
- 901-911 E. Pike Street -- Tyson Oldsmobile Company -- Frame Central
- 1217-1221 E. Pike Street -- S. L. Savidge -- Elysian Brewery
- 915-919 E. Pike Street -- Graham Motor Cars -- Shambhala Center of Seattle
- 1525 11th Avenue -- Bocker Building -- REI/Value Village
- 1400 12th Avenue -- Bekins Moving and Storage -- Trace Lofts
- 1201-1205 E. Pike Street -- Standard Brands -- 1205 E. Pike Building
- 1519-1521 Broadway -- Eldridge Tire Company -- Broadway Café
- 1120-1124 E. Pike Street -- Packard Seattle -- Utrecht Art Supplies
- 953 E. Union Street -- Otto's Radiator Service -- The Finer Details
- 301-309 E. Pine Street -- Melrose Building -- Melrose Building
- 311-321 E. Pine Street -- Timken Roller Bearing -- Le Frock
- 721-725 E. Pine Street -- Flick and Rash -- Bill's Off Broadway
- 1600 Broadway -- Boone and Company Pontiac -- AEI Music
- 1511 Boylston Avenue -- Glencoe Apartments -- Glencoe Apartments
- 1633 Melrose Avenue -- Sherwood Apartments -- Sherwood Apartments
- 1631 Belmont Avenue -- Conrad Apartments -- Conrad Apartments
- 401 E. Pine Street -- Carr Brothers Auto Repair -- General Petroleum Museum
- 1520 Melrose Avenue -- Melrose Apartments -- Melrose Apartments
- 1351 Olive Way -- Unknown -- Phillip's Old Books and Records

1611 Boylston Avenue -- Universal Repair Shop -- Universal Repair Shop

1001 E. Pike Street -- Unknown -- Arensburg/La Puerta

1134 Broadway -- Unknown -- Vacant

1400 Broadway -- Johnson & Hamilton Mortuary -- Gilda's Club of Seattle

1426 Broadway -- Unknown -- Rutherford's Auto Rebuild

1158 Broadway -- Unknown -- Complete Automotive

1414 Broadway -- Western Auto Wrecking -- Aker's

1612 Broadway -- Unknown -- AEI Music

400 E. Pine Street -- Hirsch Cycle Co. -- Lighting Design Lab and 4 others

501 E. Pine Street -- Unknown -- Bell Ochio 7 and 3 others

610 E. Pine Street -- Unknown -- Capitol Loans and 4 others

619 E. Pine Street -- Paige Building -- R Place

801-805 E. Pine Street -- Masonic Temple -- Egyptian Theater and SCCC

911-919 E. Pine Street -- Odd Fellows Temple -- Odd Fellows Temple

909 E. Pine Street -- Unknown -- In 2 Services

1101 E. Pine Street -- S-E Co. -- 2nd Base and 1 other

1315-1323 E. Pine Street -- Chester Apartments -- Capital Grocery and 2 others

1100-1106 E. Union Street -- Unknown -- Union Art Co-op

1015-1021 E. Pike Street -- Lorraine Court Apartments -- Wildrose and 2 others

300 E. Pike Street -- Gallagher's Fine Cars -- Six Arms

1415-1423 10th Avenue -- Unknown -- Crescent Down works and 4 others

1101-1103 E. Pike Street -- Liebeck Garage -- Aria and 7 others

1011-1013 E. Pike Street -- Unknown -- Chrissa's Window Bar and 1 other

1319 E. Madison Street -- Talbot Building -- Callahan's Auto Rebuild

1?Source of Table A for 23.73.010: The Department of Neighborhoods November 2002 Historic Resources Survey, structures categorized as "Yes - Inventory" or "Yes - Hold".

F. Height exception for lots that include a character structure. In zones with a mapped height limit of 65 feet, or with a 40 foot mapped height limit with provisions allowing for additional height up to 65 feet pursuant to subsection 23.47A.012.A, the Director may permit the height of a structure to exceed the height limit of the zone by 10 feet, subject to the following:

1. The lot includes a character structure, or significant portion of a character structure ((and meets the provisions of subsection 23.73.010.C));

2. For a project that incorporates a character structure, the following conditions shall be met:

a. All street facing facades of the character structure are retained;

b. All portions of the new structure above the height of the street facing facades of the character structure are set back a minimum

of 15 feet from all street property lines that abut the character structure; and

c. The original floor to ceiling height of the ground story is maintained.

((2)3. The additional floor area above the height of 65 feet is occupied solely by residential use; and

((3). The project will not result in the demolition of a designated landmark or of a character structure that is identified on Table A for 23.73.010, except as allowed to include a portion of a character structure in the new development pursuant to subsection 23.73.010.C.

Section 6. This ordinance shall take effect and be in force thirty (30) days from and after its approval by the Mayor, but if not approved and returned by the Mayor within ten (10) days after presentation, it shall take effect as provided by Municipal Code Section 1.04.020.

Passed by the City Council the 13th day of September, 2010, and signed by me in open session in authentication of its passage this 13th day of September, 2010.

RICHARD CONLIN,

President of the City Council.

Approved by me this 23rd day of September, 2010.

MICHAEL MCGINN,

Mayor.

Filed by me this 24th day of September, 2010.

(Seal) JUDITH E. PIPPIN,

City Clerk.

Attachment 1: Pike/Pine Urban Center Village Design Guidelines, 2010

Date of publication in the Seattle Daily Journal of Commerce, September 30, 2010.

9/30(261083)