


Kerry Smith
CEN Comcast ROE Exhibit A to ORD ATT 1
May 25, 2012
Version 1

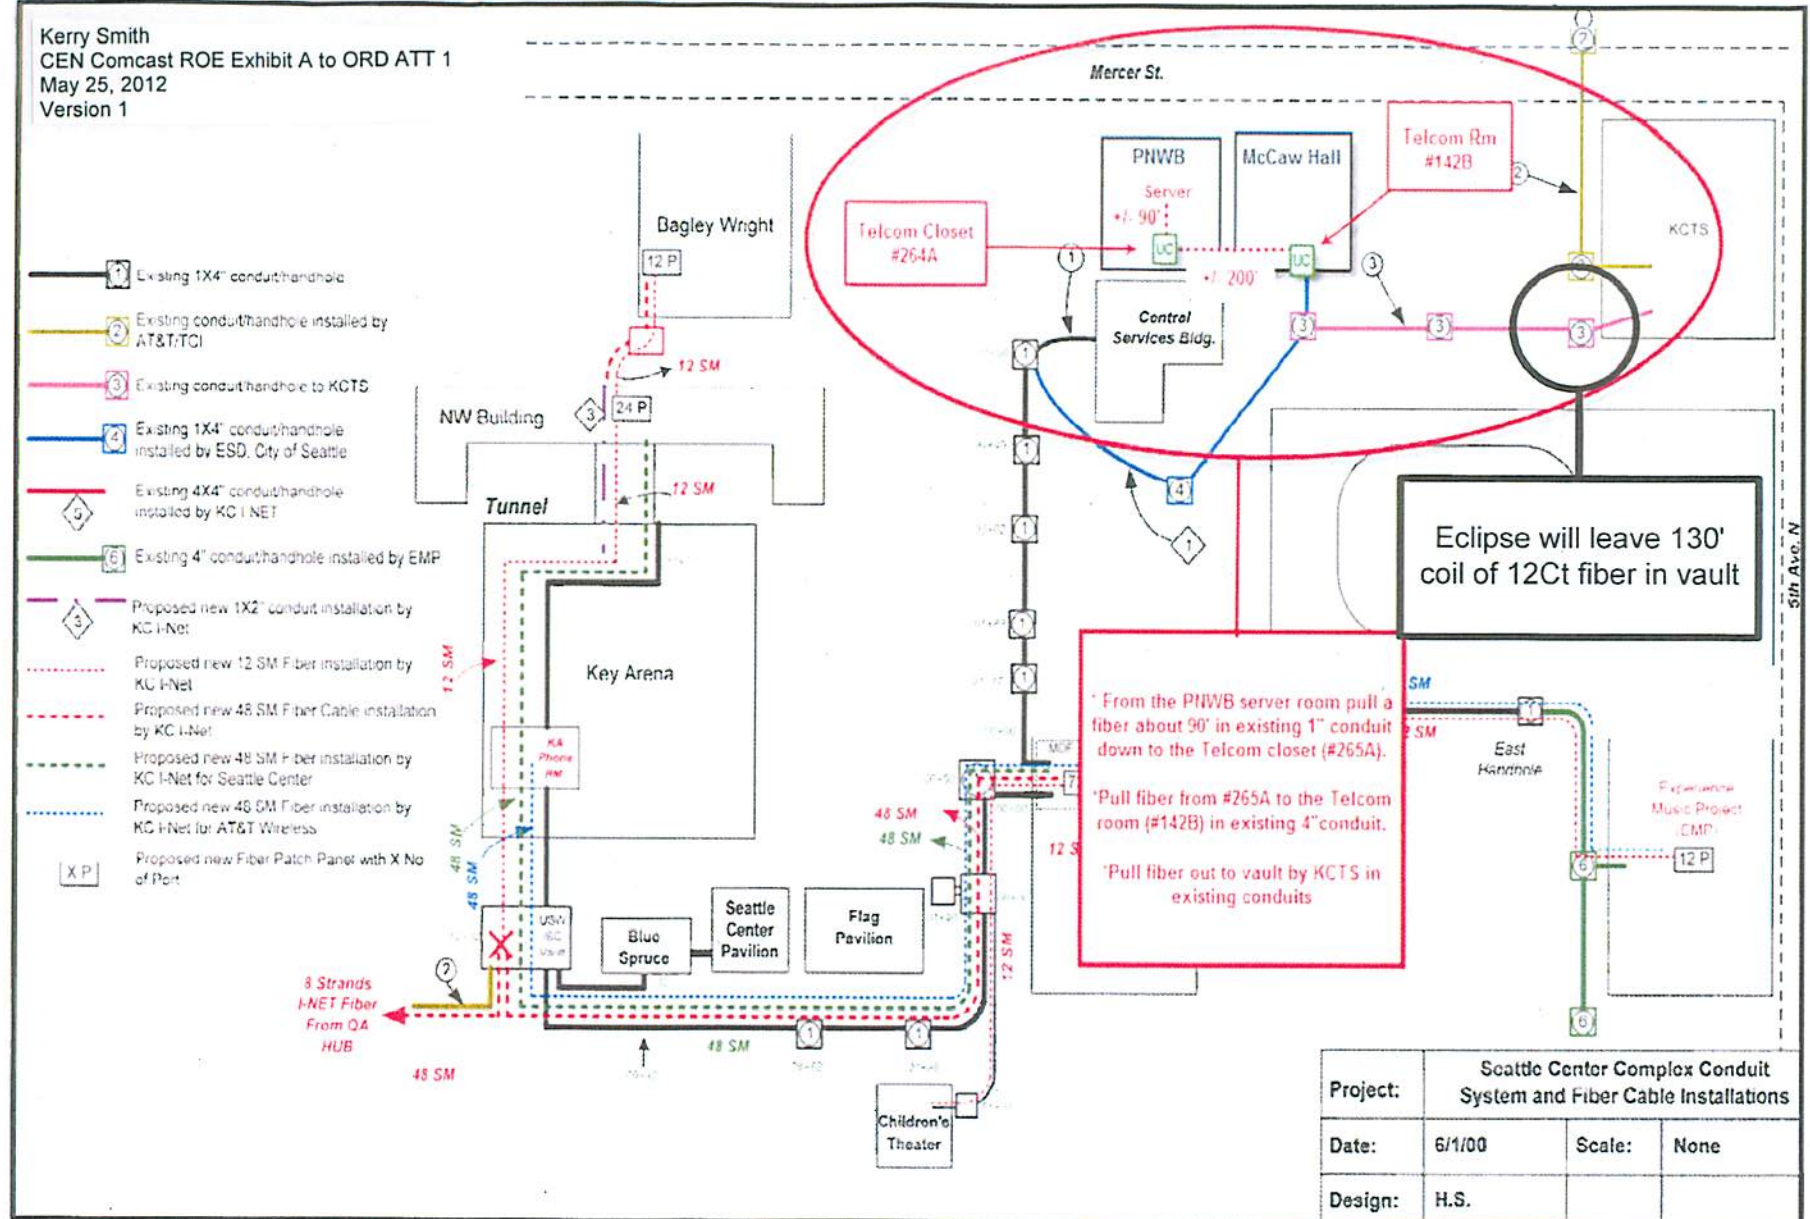

Site #	JT # 56584	Date	11/12/10	By	Bart Sistik	Task	Surveyed	Engineered For:		Page Title	Sheet 1 - Sefnco Handoff
Site Name	Pacific Northwest Ballet					Designed				Date	Nov 12, 2010
Address	301 Mercer St Seattle Wa 98109					Approved				Title	56584 - Sefnco Handoff - 8x10 vsd

Comcast

eclipse
engineering
1150 Industrial Drive
Tukwila, Washington 98188
Phone: 206.234.8500

From node at 6th and Roy over lash fiber north to Valley the go west over lash to 4th then head south down fourth riser down to HH next to pole #602. Proof and pull fiber north to HH at Republic and fourth 500ft and leave coil.

1700ft of aerial and 500ft ug proof and pull.



HH next to pole #602 on 4th ave.


Site #	JT # 56584	Date	By	Task	Engineered For:	Page Title	
Site Name	Pacific Northwest Ballet	11/12/10	Bart Sisteck	Surveyed	 	Sheet 2 - vault	
Address:	301 Mercer St Seattle Wa 98109			Designed		Date	Nov 12, 2010
				Approved		Title	56584 - Sefnco Handoff - 8x10.vsd

Kerry Smith
CEN Comcast ROE Exhibit A to ORD ATT 1
May 25, 2012
Version 1

Exhibit A

KCTS – Seattle Center Conduit
(NOT TO SCALE)

Side view of vault 1

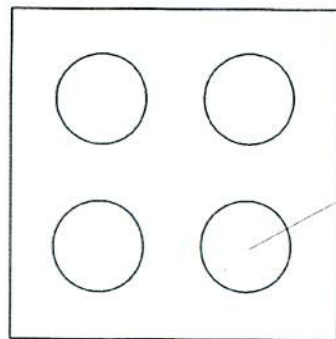

Licensed Conduit

McCaw Hall IT City Fiber

100'

220'

300'

60'

85'

KCTS Vault 1

Comcast Vault

Arena wall box to roof


KCTS Vault 2

KCTS Vault 4

KCTS Vault 3

Behind McCaw Hall

Behind Arena

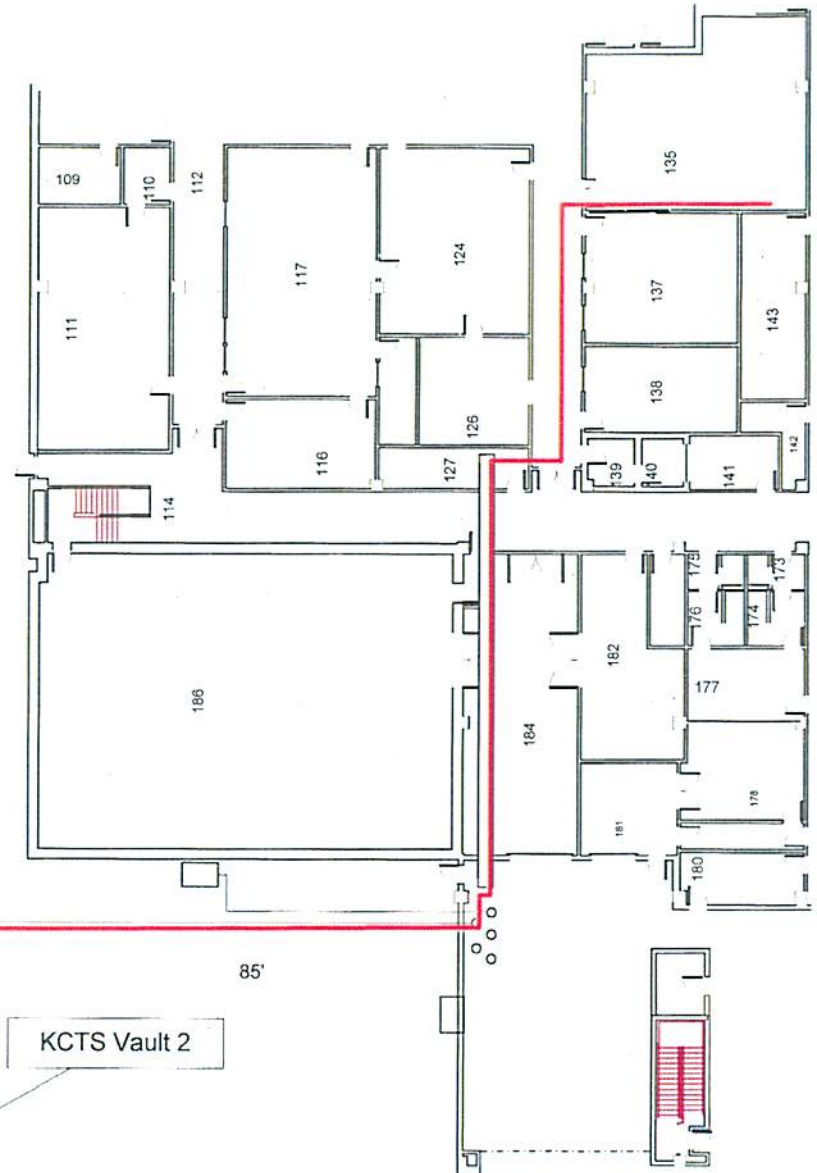

12 pr SM/MM from McCaw Hall
telecom to KCTS Room 135